

LED Neon Light (Mini Domed)


LED柔性霓虹灯(迷你半圆形发光)





PRODUCT PARAMETERS


产品参数


产品特点


 Bending Diameter


 IK08 Protection


 Waterproof IP67

 CRI 70-85


 Dimmable




 II

 HEAT SHOCK tested

 Saltwater resistant

 Anti-UV PVC

 Easy installation

	Articel NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Q'ty/m LED数量	W/m 最大功率
 EML-LN01	EML-LN01-108L-WW-DC24V	8.5*18	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/15m			
	EML-LN01-120L-WW-DC24V		DC12V	25cm	DC12V/8M		120L	≤ 8W
			DC24V	5cm	DC24V/8M			
			DC12V	2.5cm	DC12V/5M			
			DC5V	1.67cm	DC5V/2M			
EML-LN01-180L-WW-DC24V	DC24V	3.33cm	DC24V/5M	180L	≤ 12W			
	DC12V	1.67cm	DC12V/3M					
 EML-LN02	EML-LN02-60L-RGB-DC24V	9*21	AC240V	100cm	AC240V/100m	RGB	60L	≤ 12W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/10m			
			DC12V	25cm	DC12V/5M			
	EML-LN02-70L-RGB-DC24V		DC24V	25cm	DC24V/10m		70L	
 EML-LN03	EML-LN03-60L-RGB-DC24V	11*20	AC240V	100cm	AC240V/100m	RGB	60L	≤ 12W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/10m			
			DC12V	25cm	DC12V/5M			
	EML-LN03-108L-WW-DC24V		AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/15m			
			DC12V	25cm	DC12V/8M			

备注：EML-LN01-120L/180L为无铜导线LED霓虹灯带。 Note: EML-LN01-120L/180L is a no copper conductor LED neon light.

LED Neon Light (Mini Flat)

LED柔性霓虹灯(迷你平面发光)

产品特点

- 采用高品质的SMD LED芯片制作。
- 采用抗紫外线和阻燃结构环保PVC。
- 超薄尺寸，适合线条类的灯光项目。
- 发光柔和均匀，无暗区黑点。
- 最小弯折直径可达9mm。
- 容易使用，可DIY创意，安装接线灵活。
- 240V高压产品连续长度可达100米以上。
- 自动化生产工艺可靠性高，品质能够长期保证。
- 2年免费保修，使用寿命最长可达3-5年以上。

Feature

1. High quality SMD LED chip.
2. UV & Flame resistant construction PVC.
3. Slim size with domed surface for line lighting project.
4. Uniform & Even light source with no LED 'hotspots'.
5. Flexible with 9mm Minimum bending diameter.
6. Easy to use, with DIY accessories for joining,terminating, flexible mounting & powering.
7. Continuous length up to 100mbase in AC240V.
8. Automated production, high reliability & Quality can be guaranteed for a long time.
9. 2 years warranty.the product can keep using over 3-5 years.



PRODUCT PARAMETERS

产品参数

PRODUCT PARAMETERS

产品参数

3cm

Bending Diameter

IK08

Protection

waterproof

IP67

70-85

Dimmable

II

HEAT SHOCK

tested

Saltwater resistant

Anti-UV

PVC


Easy installation

	Articel NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Q'ty/m LED数量	W/m 最大功率
<div> <div>160°</div> <div>7.0</div> <div>EML-LN04</div> </div>	EML-LN04-108L-WW-AC110V	7*12.8	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W
			AC110V	50cm	AC110V/45m			
<div> <div>160°</div> <div>8.0</div> <div>EML-LN05</div> </div>	EML-LN05-108L-WW-DC24V	8*15.8	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/15m			
			DC12V	25cm	DC12V/8M			
	EML-LN05-120L-WW-DC24V		DC24V	5cm	DC24V/8M		120L	≤ 8W
			DC12V	2.5cm	DC12V/5M			
	EML-LN05-180L-WW-DC24V		DC5V	1.67cm	DC5V/2M		180L	≤ 12W
			DC24V	3.33cm	DC24V/5M			
DC12V	1.67cm	DC12V/3M						
<div> <div>160°</div> <div>11.5</div> <div>EML-LN06</div> </div>	EML-LN06-60L-RGB-DC24V	11.5*22	AC240V	100cm	AC240V/100m	RGB	60L	≤ 12W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/10m			
			DC12V	25cm	DC12V/5M			
	EML-LN06-108L-WW-DC24V		AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/15m			
			DC12V	25cm	DC12V/8M			

备注：EML-LN05-120L/180L为无铜导线LED霓虹灯带。 Note: EML-LN05-120L/180L is a no copper conductor LED neon light.

LED Neon Light (Mini Double Sided)

LED 柔性霓虹灯(迷你双面发光)


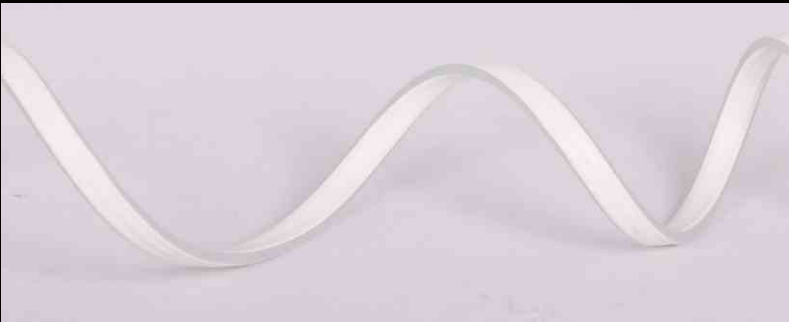


应用场景：

主要用于DIY圣诞主题图案灯画创意，街道路灯横跨灯光隧道、路灯杆用图案造型灯、小型挂树图案、造型灯、创意灯光隧道

Application scenarios:

It is mainly used for the creative design of DIY Christmas themed lights, street lights across the light tunnel, lamppost, pattern lamp, small hanging tree pattern, modeling lamp, creative light tunnel.....

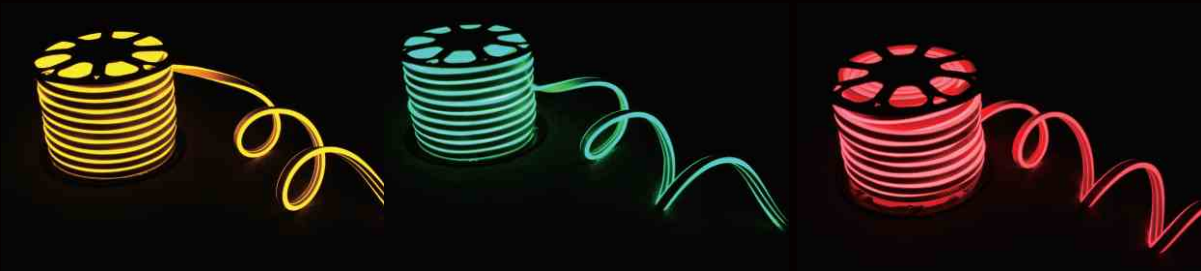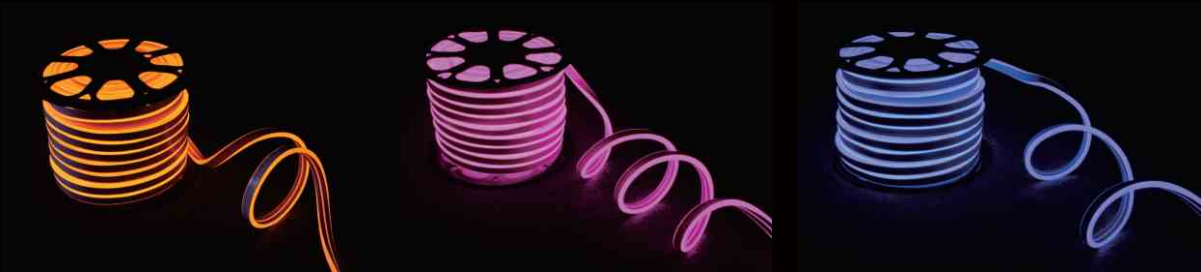

LED Neon light Product naming rules LED 霓虹灯产品命名规则

EML LN08 108L WW DC24V

优明灯饰

eumin light

霓虹灯08款

LED Neon light08

灯珠数量

q'ty/m

光色


Color

工作电压

voltage

LED Neon Light (Mini Double Sided)

LED 柔性霓虹灯(迷你双面发光)

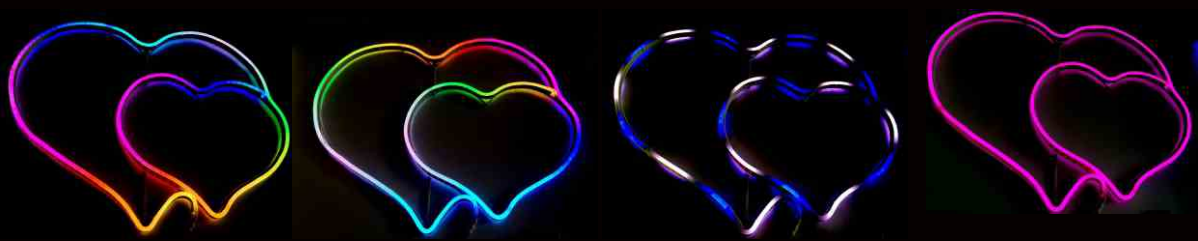

PRODUCT PARAMETERS

产品参数





 EML-LN07	Article NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Qty/m LED数量	W/m 最大功率
	EML-LN07-108L-WW-AC110V	8*14.5	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W
			AC110V	50cm	AC110V/45m			
 EML-LN08	EML-LN08-108L-WW-DC24V	8.3*18	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/15m			
	EML-LN08-120L-WW-DC24V		DC12V	25cm	DC12V/8M		120L	≤ 8W
			DC24V	5cm	DC24V/8M			
			DC12V	2.5cm	DC12V/5M			
 EML-LN09	EML-LN09-60L-RGB-DC24V	9*22	AC240V	100cm	AC240V/100m	RGB	60L	≤ 12W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/10m			
			DC12V	25cm	DC12V/5M			
	EML-LN09-70L-RGB-DC24V		DC24V	25cm	DC24V/10m		70L	

备注：EML-LN08-120L/180L为无铜导线LED霓虹灯带。 Note: EML-LN08-120L/180L is a no copper conductor LED neon light.

LED Neon Light (Round 360°)

LED柔性霓虹灯(圆形360° 发光)

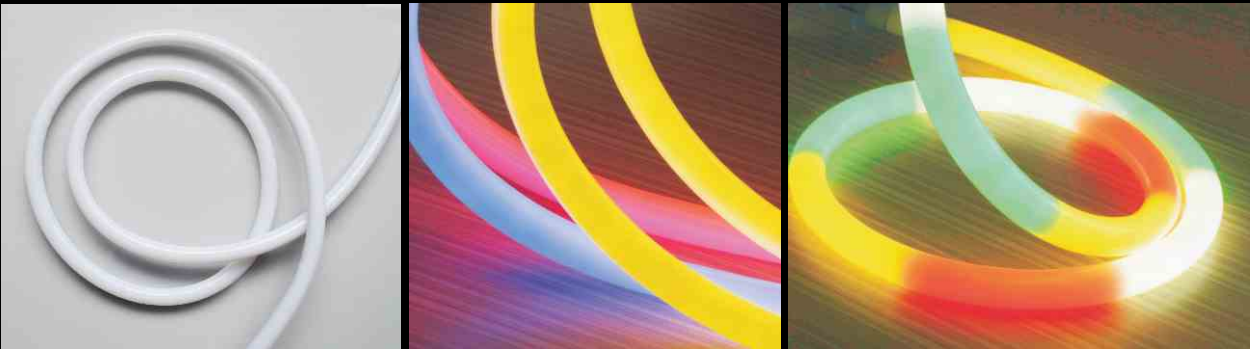


应用场景
主要用于广告牌装饰，建筑轮廓勾画，别墅山庄及古建筑勾画轮廓造型，广告字DIY，室内暗槽及内透光装饰照明；酒吧、西餐厅、KTV等场所的DIY创意….

Application scenarios:
It is mainly used for the billboard decoration, building outline, the villa delineation and ancient building modelling, DIY advertising word, indoor dark slot and pervious to light decorative lighting in bar, restaurant, KTV , creative DIY....

PRODUCT PARAMETERS


产品参数

	Article NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Q'ty/m LED数量	W/m 最大功率
 EML-LN10	EML-LN10-108L-WW-DC24V	Ø16	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/15m			
	EML-LN10-120L-WW-DC24V		DC12V	25cm	DC12V/8M		120L	≤ 8W
			DC24V	5cm	DC24V/8M			
			DC12V	2.5cm	DC12V/5M			
	EML-LN08-180L-WW-DC24V		DC5V	1.67cm	DC5V/2M		180L	≤ 12W
			DC24V	3.33cm	DC24V/5M			
			DC12V	1.67cm	DC12V/3M			

备注：EML-LN10-120L/180L为无铜导线LED霓虹灯带。 Note: EML-LN10-120L/180L is a no copper conductor LED neon light.

LED Neon Light (Abnormal Oversize)

LED柔性霓虹灯(异形大号)


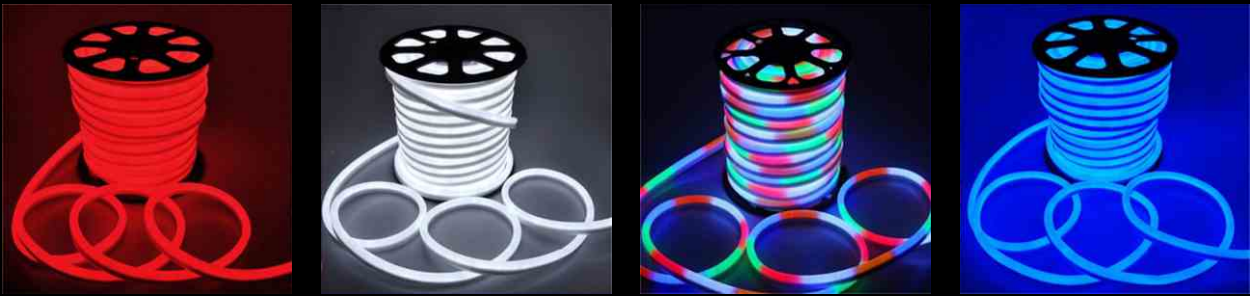


Waterproof end cup 9ft led power cord I connector with two pins & connector with two pins T connector with three pins

PRODUCT PARAMETERS

产品参数




	Item No 产品型号	Size(mm) 尺寸	Voltage 工作电压	Unit Longness 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Q'ty LED数量	W/m 最大功率	
<div></div> <div>EML-LN11</div> <div></div>	EML-LN11-80L-Ø3WW-AC110V	16*26	AC240V	100cm	AC240V/200m	R/G/B P/O/Y WW/W CW	80L	≤ 4.5W	
			AC110V	50cm	AC110V/100m				
			DC24V	8.8cm	DC24V/20m				
	EML-LN11-80L-Ø5WW-AC110V		AC240V	100cm	AC240V/200m		80L	≤ 4.5W	
			AC110V	50cm	AC110V/100m				
			DC24V	8.8cm	DC24V/20m				
	EML-LN11-108L-WW-AC110V	16*26	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W	
			AC110V	50cm	AC110V/45m				
			DC24V	25cm	DC24V/15m				
	EML-LN11-60L-RGB-DC24V		DC12V	25cm	DC12V/8M		RGB	60L	≤ 12W
			AC240V	100cm	AC240V/100m				
			AC110V	50cm	AC110V/45m				
	EML-LN11-70L-RGB-DC24V		DC24V	25cm	DC24V/10m	RGB	70L		
			DC12V	25cm	DC12V/5M				
			DC24V	25cm	DC24V/10m				

LED Neon Light (Abnormal Oversize)

LED 柔性霓虹灯(异形超大)


应用场景
主要用于大型建筑、桥梁、江河堤岸护栏及边檐轮廓勾画显示。

Application scenarios:
It is mainly used for the outline of large buildings, Bridges, river bank guardrails and eaves.

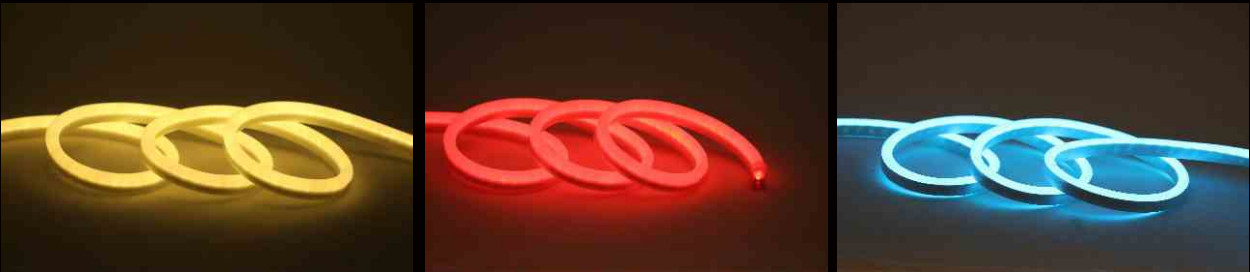

LED Neon Light (Domed Oversize)

LED 柔性霓虹灯(半圆形大号)

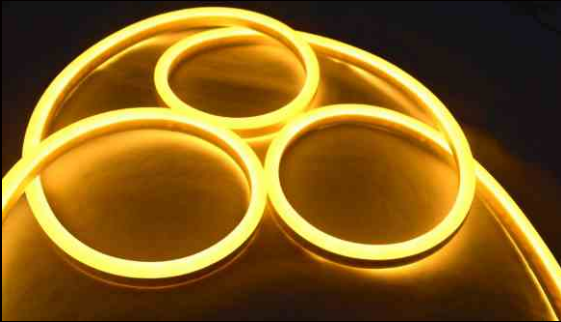

应用场景
主要用于广告牌装饰，建筑轮廓勾画，别墅山庄及古建筑勾画轮廓造型，广告字DIY，室内暗槽及内透光装饰照明；酒吧、西餐厅、KTV等场所的DIY创意….

Application scenarios:
It is mainly used for the billboard decoration, building outline, the villa delineation and ancient building modelling, DIY advertising word, indoor dark slot and pervious to light decorative lighting in bar, restaurant, KTV , creative DIY.....



PRODUCT PARAMETERS

产品参数




	Articel NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Q'ty/m LED数量	W/m 最大功率
 EML-LN12	EML-LN12-160L-Ø5WW-DC24V	30*30	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	160L	≤ 10W
			AC110V	50cm	AC110V/45m			
			DC24V	8.8cm	DC24V/15m			
	EML-LN12-160L-Ø5RB-DC24V	30*30	AC240V	100cm	AC240V/100m	RB/BG RW/BW W+WW	160L	≤ 10W
			AC110V	50cm	AC110V/45m			
			DC24V	8.8cm	DC24V/15m			
	EML-LN12-240L-WW-DC24V	30*30	AC240V	100cm	AC240V/50m	R/G/B P/O/Y WW/W CW	240L	≤ 16W
			AC110V	50cm	AC110V/25m			
			DC24V	25cm	DC24V/10m			
			DC12V	25cm	DC12V/5M			

PRODUCT PARAMETERS

产品参数



	Articel NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Q'ty/m LED数量	W/m 最大功率
 EML-LN13	EML-LN13-108L-WW-DC24V	16*18	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 8W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/15m			
			DC12V	25cm	DC12V/8M			
	EML-LN13-60L-RGB-DC24V	16*18	AC240V	100cm	AC240V/100m	RGB	60L	≤ 12W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/10m			
	EML-LN13-70L-RGB-DC24V	16*18	DC12V	25cm	DC12V/5M		70L	≤ 12W
			DC24V	25cm	DC24V/10m			

LED Neon Light (Square Flat)

LED柔性霓虹灯(方形平面发光)



Application scenarios:
It is mainly used for the billboard decoration, building outline, the villa delineation and ancient building modelling, DIY advertising word, indoor dark slot and pervious to light decorative lighting in bar, restaurant, KTV , creative DIY....




应用场景
主要用于广告牌装饰，建筑轮廓勾画，别墅山庄及古建筑勾画轮廓造型，广告字DIY，室内暗槽及内透光装饰照明；酒吧、西餐厅、KTV等场所的DIY创意….

PRODUCT PARAMETERS

产品参数



 EML-LN14	Articel NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Q'ty/m LED数量	W/m 最大功率
	EML-LN14-120L-WW-DC24V	16*16	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/15m			
			DC12V	25cm	DC12V/8M			

LED Neon Light (Mini Abnormal)

LED柔性霓虹灯(迷你异形)

Feature

1. High quality SMD LED chip.
2. UV & Flame resistant construction PVC.
3. Slim size with domed surface for line lighting project.
4. Uniform & Even light source with no LED"hotspots".
5. Flexible with 9mm Minimum bending diameter.
6. Easy to use, with DIY accessories for joining,terminating, flexible mounting & powering.
7. Continuous length up to 100mbase in AC240V.
8. Automated production, high reliabilty & Quality can be guaranteed for a long time.
9. 2 years warranty.the product can keep using over 3-5 years.

产品特点


- 采用高品质的SMD LED芯片制作。
- 采用抗紫外线和阻燃结构环保PVC。
- 超薄尺寸， 适合线条类的灯光项目。
- 发光柔和均匀，无暗区黑点。
- 最小弯折直径可达9mm。
- 容易使用，可DIY创意，安装接线灵活。
- 240V高压产品连续长度可达100米以上。
- 自动化生产工艺可靠性高，品质能够长期保证。
- 2年免费保修，使用寿命最长可达3-5年以上。



PRODUCT PARAMETERS

产品参数




 EML-LN15	Articel NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Qty/m LED数量	W/m 最大功率
	EML-LN15-108L- WW-DC24V	8.8*14	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/15m			
	EML-LN15-120L- WW-DC24V		DC12V	25cm	DC12V/8M		120L	≤ 8W
			DC24V	5cm	DC24V/8M			
			DC12V	2.5cm	DC12V/5M			
DC5V		1.67cm	DC5V/2M					

 EML-LN16	EML-LN16-108L-WW-DC24V	10*16	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≦ 7W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/15m			
	EML-LN16-120L-WW-DC24V		DC12V	25cm	DC12V/8M		120L	≦ 8W
			DC24V	5cm	DC24V/8M			
			DC12V	2.5cm	DC12V/5M			
			DC5V	1.67cm	DC5V/2M			

备注：EML-LN15/LN16-120L为无铜导线LED霓虹灯带。Note: EML-LN15/LN16-120L is a no copper conductor LED neon light.

LED Neon Light (Silicone)

LED 柔性霓虹灯(硅橡胶)

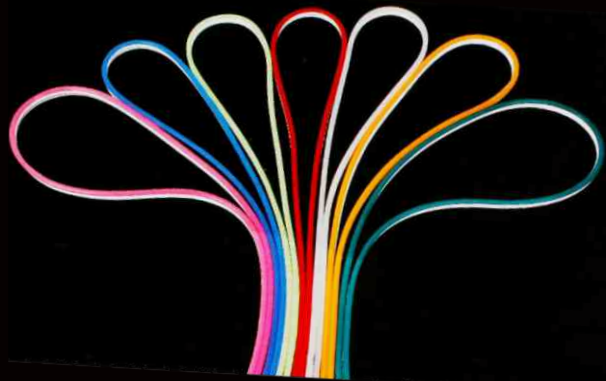


Feature

- 1. High quality SMD LED chip.
- 2. UV & Flame resistant construction Silicone rubber.
- 3. Slim size with domed surface for line lighting project.
- 4. Uniform & Even light source with no LED"hotspots".
- 5. Flexible with 9mm Minimum bending diameter.
- 6. Easy to use, with DIY accessories for joining,terminating, flexible mounting & powering.
- 7. Continuous length up to 100mbase in AC240V.
- 8. Automated production, high reliability & Quality can be guaranteed for a long time.
- 9. 3 years warranty.the product can keep using over 3–5 years.

PRODUCT PARAMETERS

产品参数



 Model:EML-LN17	Artical NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Q'ty/m LED数量	W/m 最大功率
	EML-LN17-108L-WW-DC24V	8*16	AC240V	100cm	AC240V/100m	R/G/B P/O/Y WW/W CW	108L	≤ 7W
			AC110V	50cm	AC110V/45m			
			DC24V	25cm	DC24V/15m			
	EML-LN17-120L-WW-DC24V	8*16	DC12V	25cm	DC12V/8M		120L	≤ 8W
			DC24V	5cm	DC24V/8M			
			DC12V	2.5cm	DC12V/5M			
			DC5V	1.67cm	DC5V/2M			

LED Neon light Product naming rules LED霓虹灯产品命名规则

EML LN17 120L WW DC24V

优明灯饰
eumin light

霓虹灯17款
LED Neon light17

灯珠数量
q'ty/m

光色
Color






工作电压
voltage

备注：EML–LN17–120L为无铜导线LED霓虹灯带。

Note: EML-LN17-120L is a no copper conductor LED neon light.


LED Neon Light (Silicone)

LED 柔性霓虹灯(硅橡胶)

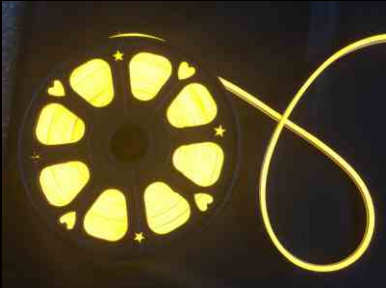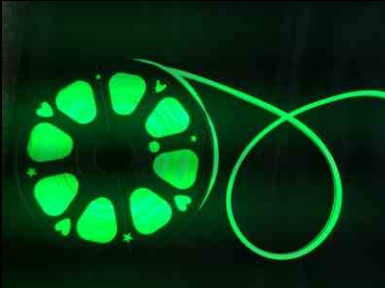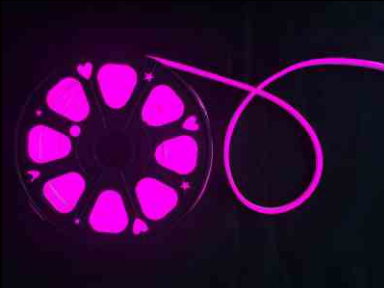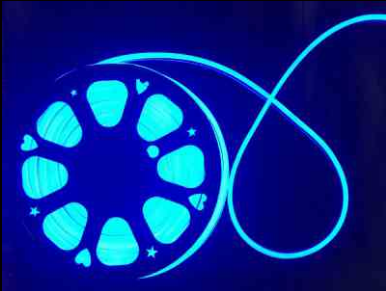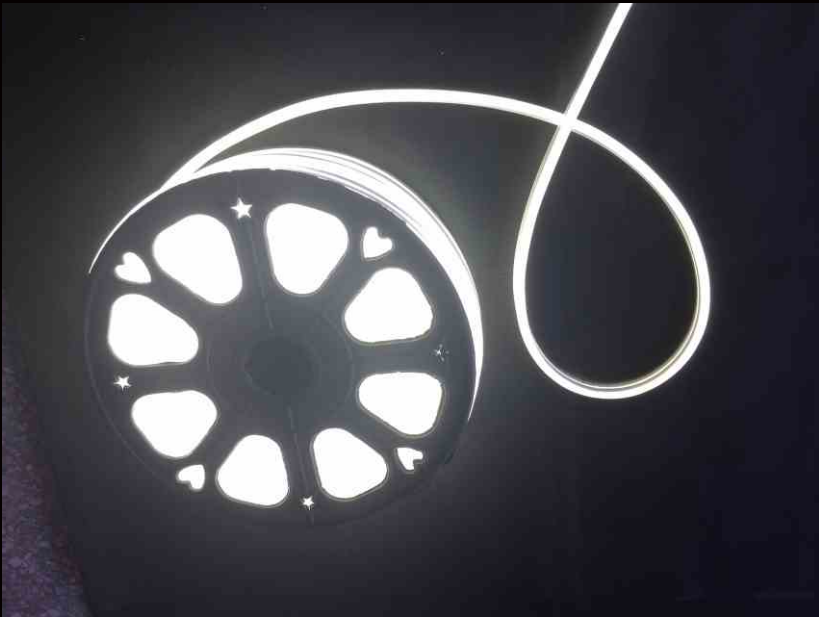

Application scenarios:


It is mainly used for the creative design of DIY Christmas themed lights, street lights across the light tunnel, lamppost, pattern lamp, small hanging tree pattern, modeling lamp, creative light tunnel.....

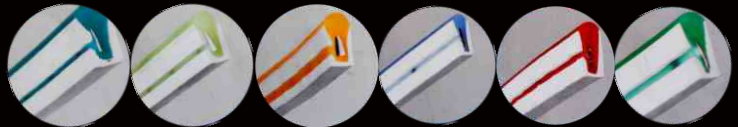

PRODUCT PARAMETERS

产品参数



 Model:EML-LN18	Artical NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Q'ty/m LED数量	W/m 最大功率
	EML-LN18-120L-WW-DC24V	5.5*12	DC24V	5cm	DC24V/8M	R/G/B P/O/Y WW/W CW	120L	≤ 8W
			DC12V	2.5cm	DC12V/5M			
			DC5V	1.67cm	DC5V/2M			

备注：EML–LN18–120L为无铜导线LED霓虹灯带。

Note: EML-LN18-120L is a no copper conductor LED neon light.

DIY Creative LED Neon Sign Light (Indoor Type)
DIY创意LED霓虹标志灯(室内型)



NO.EML-NSL01
RV: DC24V/12V/5V
Size:L53*H20mm

NO.EML-NSL02
RV: DC24V/12V/5V
Size:L60*H30mm

NO.EML-NSL03
RV: DC24V/12V/5V
Size:L60*H30mm

NO.EML-NSL04
RV: DC24V/12V/5V
Size:L50*H30mm



NO.EML-NSL05
RV: DC24V/12V/5V
Size:L50*H25mm

NO.EML-NSL06
RV: DC24V/12V/5V
Size:L74.5*H26mm

NO.EML-NSL07
RV: DC24V/12V/5V
Size:L44*H59mm

NO.EML-NSL08
RV: DC24V/12V/5V
Size:L53*H49mm



NO.EML-NSL09
RV: DC24V/12V/5V
Size:L32*H48mm

NO.EML-NSL10
RV: DC24V/12V/5V
Size:L50*H20mm

NO.EML-NSL11
RV: DC24V/12V/5V
Size:L60*H30mm

NO.EML-NSL12
RV: DC24V/12V/5V
Size:L40*H8mm




NO.EML-NSL13
RV: DC24V/12V/5V
Size:L33*H53mm

NO.EML-NSL14
RV: DC24V/12V/5V
Size:L70*H40mm

NO.EML-NSL15
RV: DC24V/12V/5V
Size:L90*H30mm

NO.EML-NSL16
RV: DC24V/12V/5V
Size:L48*H25mm

DIY Creative LED Neon Sign Light (Indoor Type)
DIY创意LED霓虹标志灯(室内型)

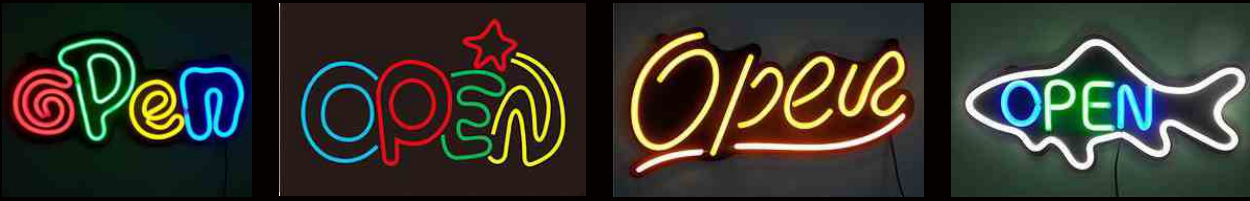

NO.EML-NSL17
RV: DC24V/12V/5V
Size:L58*H28mm

NO.EML-NSL18
RV: DC24V/12V/5V
Size:L54*H30mm

NO.EML-NSL19
RV: DC24V/12V/5V
Size:L58*H28mm

NO.EML-NSL20
RV: DC24V/12V/5V
Size:L48*H24mm



NO.EML-NSL21
RV: DC24V/12V/5V
Size:L50*H25mm

NO.EML-NSL22
RV: DC24V/12V/5V
Size:L56*H41mm

NO.EML-NSL23
RV: DC24V/12V/5V
Size:L48*H25mm

NO.EML-NSL24
RV: DC24V/12V/5V
Size:L48*H35mm




NO.EML-NSL25
RV: DC24V/12V/5V
Size:L48*H24mm

NO.EML-NSL26
RV: DC24V/12V/5V
Size:L48*H25mm

NO.EML-NSL27
RV: DC24V/12V/5V
Size:L48*H24mm

NO.EML-NSL28
RV: DC24V/12V/5V
Size:L48*H25mm

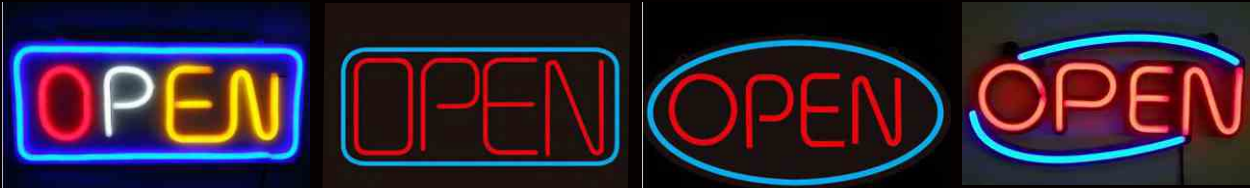

NO.EML-NSL29
RV: DC24V/12V/5V
Size:L48*H21mm

NO.EML-NSL30
RV: DC24V/12V/5V
Size:L50*H25mm

NO.EML-NSL31
RV: DC24V/12V/5V
Size:L60*H30mm

NO.EML-NSL32
RV: DC24V/12V/5V
Size:L50*H25mm

此系列产品支持非标定制 This series of products support non-standard customization

DIY Creative LED Neon Motif Light (Waterproof)

DIY创意LED霓虹图案灯(可防水)



NO.: NDL-DIY01
RV:DC24V/12V/5V



NO.: NDL-DIY02
RV:DC24V/12V/5V



NO.: NDL-DIY03
RV:DC24V/12V/5V



NO.: NDL-DIY04
RV:DC24V/12V/5V



NO.: NDL-DIY05
RV:DC24V/12V/5V



NO.: NDL-DIY06
RV:DC24V/12V/5V



NO.: NDL-DIY07
RV:DC24V/12V/5V



NO.: NDL-DIY08
RV:DC24V/12V/5V



NO.: NDL-DIY09
RV:DC24V/12V/5V



NO.: NDL-DIY10
RV:DC24V/12V/5V



NO.: NDL-DIY11
RV:DC24V/12V/5V



NO.: NDL-DIY12
RV:DC24V/12V/5V

DIY Creative LED Neon Motif Light (Waterproof)

DIY创意LED霓虹图案灯(可防水)



NO.: NDL-DIY13
RV:DC24V/12V/5V



NO.: NDL-DIY14
RV:DC24V/12V/5V



NO.: NDL-DIY15
RV:DC24V/12V/5V



NO.: NDL-DIY16
RV:DC24V/12V/5V




NO.: NDL-DIY17
RV:DC24V/12V/5V



NO.: NDL-DIY18
RV:DC24V/12V/5V



NO.: NDL-DIY19
RV:DC24V/12V/5V



NO.: NDL-DIY20
RV:DC24V/12V/5V



NO.: NDL-DIY21
RV:DC24V/12V/5V



NO.: NDL-DIY22
RV:DC24V/12V/5V



NO.: NDL-DIY23
RV:DC24V/12V/5V



NO.: NDL-DIY24
RV:DC24V/12V/5V



NO.: NDL-DIY25
RV:DC24V/12V/5V



NO.: NDL-DIY26
RV:DC24V/12V/5V



NO.: NDL-DIY27
RV:DC24V/12V/5V



NO.: NDL-DIY28
RV:DC24V/12V/5V

此系列产品支持非标定制 This series of products support non-standard customization

DIY Creative LED Neon Motif Light
DIY创意LED霓虹图案灯



NO.: NDL-DIY29
RV:DC24V/12V/5V



NO.: NDL-DIY30
RV:DC24V/12V/5V



NO.: NDL-DIY31
RV:DC24V/12V/5V



NO.: NDL-DIY32
RV:DC24V/12V/5V



NO.: NDL-DIY33
RV:DC24V/12V/5V



NO.: NDL-DIY34
RV:DC24V/12V/5V



NO.: NDL-DIY35
RV:DC24V/12V/5V



NO.: NDL-DIY36
RV:DC24V/12V/5V



NO.: NDL-DIY37
RV:DC24V/12V/5V



NO.: NDL-DIY38
RV:DC24V/12V/5V

DIY Creative LED Neon Motif Light
(Indoor&Outdoor)
DIY创意LED霓虹图案灯 (室内外通用)



NO.: EML-NML01
RV: DC24V/12V/5V
Size:203*200mm



NO.: EML-NML02
RV: DC24V/12V/5V
Size:286*286mm



NO.: EML-NML03
RV: DC24V/12V/5V
Size:300*256mm



NO.: EML-NML04
RV: DC24V/12V/5V
Size:500*400mm



NO.: EML-NML05
RV: DC24V/12V/5V
Size:288*216mm



NO.: EML-NML06
RV: DC24V/12V/5V
Size:286*195mm




NO.: EML-NML07
RV: DC24V/12V/5V
Size:292*158mm



NO.: EML-NML08
RV: DC24V/12V/5V
Size:203*210mm



NO.: EML-NML09
RV: DC24V/12V/5V
Size:298*198mm



NO.: EML-NML10
RV: DC24V/12V/5V
Size:300*202mm




NO.: EML-NML11
RV: DC24V/12V/5V
Size:300*255mm



NO.: EML-NML12
RV: DC24V/12V/5V
Size:290*160mm




NO.: EML-NML13
RV: DC24V/12V/5V
Size:270*178mm




NO.: EML-NML14
RV: DC24V/12V/5V
Size:300*202mm



NO.: EML-NML15
RV: DC24V/12V/5V
Size:190*236mm




NO.: EML-NML16
RV: DC24V/12V/5V
Size:200*286mm



NO.: EML-NML17
RV: DC24V/12V/5V
Size:300*180mm



NO.: EML-NML18
RV: DC24V/12V/5V
Size:300*180mm



NO.: EML-NML19
RV: DC24V/12V/5V
Size:80*80mm



NO.: EML-NML20
RV: DC24V/12V/5V
Size:70*60mm

此系列产品支持非标定制 This series of products support non-standard customization

LED Round Rope Light
LED圆形彩虹管



PRODUCTS FEATURES AND APPLICATIONS:

Low power consumption, long life, high brightness, easy bending, cold light source, low carbon environmental protection, - 25 ° ~ + 45 ° temperature and other characteristics; It is especially suitable for the production of various large animation, calligraphy and painting, festival theme creative design, etc.It can also be used for the decoration of handrails, backlight and dark slot devices, such as family and hotel, bar, KTV club, wine cabinet, etc. It can also be used for lighting tunnel, lamppost decorative pattern lamp.Can reach IP65 waterproof level.

产品参数
PRODUCT PARAMETERS

	Articel NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Unit Longness 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Q'ty LED数量	W/m 最大功率
 EML-X2W 小圆二线	EML-X2W-DK -36L-W-AC110V	Φ10	AC240V	200cm	AC240V/400m	R/G/B P/O/Y WW/W RGYB	36L	≤ 2W
			AC110V	100cm	AC110V/200m			
			DC24V	16.7cm	DC24V/40m			
	EML-X2W-KC -36L-W-AC110V		AC240V	200cm	AC240V/400m		36L	≤ 2W
			AC110V	100cm	AC110V/200m			
			DC24V	10cm	DC24V/40m			
 EML-D2W 大圆二线	EML-D2W-DK -36L-W-AC110V	Φ13	AC240V	200cm	AC240V/400m	R/G/B P/O/Y WW/W RGYB	36L	≤ 2W
			AC110V	100cm	AC110V/200m			
			DC24V	16.7cm	DC24V/40m			
	EML-D2W-KC -36L-W-AC110V		AC240V	200cm	AC240V/400m		36L	≤ 2W
			AC110V	100cm	AC110V/200m			
			DC24V	16.7cm	DC24V/40m			
 EML-Y3W 圆三线	EML-D3W-KC -36L-W-AC110V	Φ13	AC240V	400cm	AC240V/400m	R/G/B P/O/Y WW/W RGYB	36L	≤ 2W
			AC110V	200cm	AC110V/200m			
			DC24V	33.3cm	DC24V/40m			
			DC12V	16.7cm	DC12V/20m			

(备注： 产品型号中 “KC代表卧式开槽” 、 “DK代表立式打孔”) (note: “KC stands for horizontal grooves” and “DK stands for vertical punching”)



LED Square Rope Light
LED方形彩虹管




PRODUCTS FEATURES AND APPLICATIONS:

This LED strip has ecological PVC skin and shed light ofeven colors.The color combination can be blended into anydreamy 7 colors with DC controller.The strip is easy to bend and suitable to illustrate outline of building and decoration of nightclub and bar. Can reach IP65 waterproof level.

产品参数
PRODUCT PARAMETERS

	Article NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Unit Longness 单元长度 (cm)	Max connection length 最大连接长度 (m)	Color 光色	LED Q'ty LED数量	W/m 最大功率	
 EML-F2W 小方二线	EML-F2W-36L-W-AC240V	11*13	AC240V	200cm	AC240V/400m	R/G/B P/O/Y WW/W RGYB	36L	≤ 2W	
			AC110V	100cm	AC110V/200m				
			DC24V	16.7cm	DC24V/40m				
	EML-F2W-60L-W-AC240V		AC240V	200cm	AC240V/200m		60L	≤ 4W	
			AC110V	100cm	AC110V/100m				
			DC24V	10cm	DC24V/25m				
 EML-BF4W 扁三线	EML-BF3W-72L-W-AC240V	11*18	AC240V	200cm	AC240V/150m	R/G/B Y/WW W/O/P BG/BW RB/RW	72L	≤ 4W	
			AC110V	100cm	AC110V/80m				
			DC24V	16.7cm	DC24V/20m				
	EML-BF3W-120L-W-AC240V		AC240V	100cm	AC240V/100m		120L	≤ 8W	
			AC110V	50cm	AC110V/45m				
			DC24V	10cm	DC24V/15m				
 EML-BF4W 扁四线	EML-BF4W-108L-W-AC240V	11*22	AC240V	200cm	AC240V/150m	R/G/B Y/WW W/O/P RGB RYB	108L	≤ 6W	
			AC110V	100cm	AC110V/80m				
			DC24V	16.7cm	DC24V/20m				
	EML-BF4W-180L-W-AC240V		AC240V	100cm	AC240V/100m		180L	≤ 12W	
			AC110V	50cm	AC110V/50m				
			DC24V	10cm	DC24V/15m				

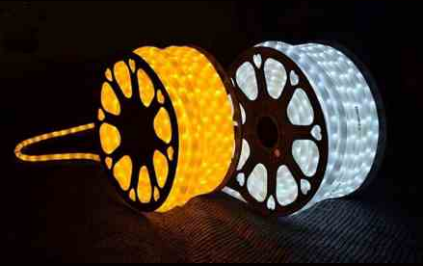

accessories 配件




SMD FLEXIBLE LAMP BAR SERIES

LED 柔性灯条是由高品质SMD 2835/5050/3014/3022/5630 LED 灯组成的，基板为柔性FPC电路板，非常柔软，可根据安装需要适当弯曲。安装方便快捷，应用于广告字，超薄灯箱，商场、家居、娱乐场所等室内照明走廊、家具、厨窗、暗槽等隐蔽位置装饰照明。

The LED flexible strips is made up of high quality SMD 2835/5050/3014/3022/5630, and the substrate is flexible FPC circuit board. It is very soft and can be flexed properly according to the need of installation. The installation is convenient and quick, used in advertising words, ultra thin light boxes, home, entertainment venues like corridor,furniture, kitchen, windows, dark grooves and other hidden locations for decorative lighting.

LED Flexible Strips (Product accessories and schematic diagram) LED 柔性灯条(产品附件及示意图)

LED Flexible strips Production process diagram

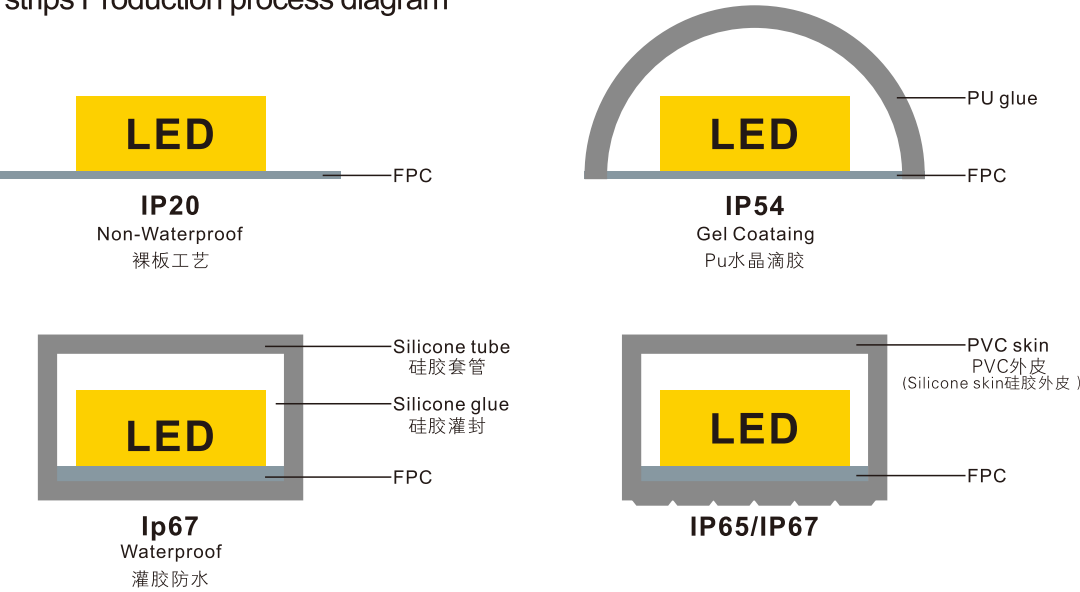

- 8mm solderless cable connector with one end clip
- 8mm单头无焊连接线



- 8mm solderless cable connector with two end clips
- 8mm双头无焊连接线



- 10mm solderless cable connector with two end clips
- 10mm双头无焊连接线



- 10mm solderless cable connector with one end clip
- 10mm单头无焊连接线



- 4 pins connector
- Match the RGB color female connector
- 4芯连接头
- RGB连接头



- 4 pins cable male connector and female connector
- Match the multi-color LED strips
- 连接RGB母座
- 连接RGB混色灯带



- White female male DC connector
- Match the single-color LED strips
- 白色公母DC连接头
- 连接单色LED灯带



- Black female male DC connector
- Match the single-color LED strips
- 黑色公母DC连接头
- 连接单色LED灯带



- T-Connector
- X-Connector
- L-Connector
- T型,X型,L型拐角器



- Use in high voltage waterproof LED strips
- 高压灯带连接器



- Use in 8mm/10mm waterproof LED strips
- 8mm LED灯带固定器



- Use in 10mm waterproof LED strips
- 10mm LED灯带尾冒

LED Flexible Strips (Low Voltage)

LED 柔性灯条(低压)



Product features

Every three or six LEDs shall be a section, accompanied by a flexible printed circuit board; the back shall be with the double-sided adhesive,which is small in volume and conveyent for in stallation, for sticking.He product can be customized according to the requirements of various occasions:

- NK-bare board(indoor use)
 - PU-Eposy(half water, the bare board drop of silicone, process a little complicated)
 - PC-tube(waterproof, outdoor use, the bare board sets of flexible waterproof silicone tube)
 - PU+PC solid casing epoxy(fully waterproof, outdoor use complex environment, work)
- product purpose:this series of product is for the occasions as interior dark groove decoration, wine cabinets, lockers, display cabinets, car decoration, hotel decoration, city brightening, outdoor advertising, places of entertainment, etc.





PRODUCT PARAMETERS

产品参数

Articel NO. 产品型号	PCB Size	Voltage 工作电压	Min.Cutting Length 单元长度	Max connection length 最大连接长度	Color 光色	LED Q'ty/m LED数量	W/m 最大功率	Process
EML-LFS-5050/30L-WW	10mm	DC12V	10cm	800cm	R/G/B P/O/Y WW/W CW/NW GY/IB RGB RGBW 双色W+WW	30L	≤ 6W	裸板/IP20 PU滴胶/IP54 硅胶套管/IP65 PVC外皮/IP67 硅胶外皮/IP68
EML-LFS-5050/48L-WW	10mm	DC12/24V	6.25/12.5cm	500cm		48L	≤ 9W	
EML-LFS-5050/60L-WW	10mm	DC12/24V	5/10cm	500cm		60L	≤ 12W	
EML-LFS-5050/120L-WW	15mm	DC24V	5/10cm	500cm		120L	≤ 24W	
EML-LFS-5630/30L-WW	10mm	DC12V	10cm	500cm	WW/W CW/NW GY/Y WW+B 双色W+WW	30L	≤ 5W	Bare plate/IP20 PU Drops of glue/IP54 Silicone tube/IP65 PVC Shell/IP67 Silicone Shell/IP68
EML-LFS-5630/60L-WW	10mm	DC12/24V	5/10cm	500cm		60L	≤ 10W	
EML-LFS-5630/120L-WW	12mm	DC12/24V	2.5/5cm	500cm		120L	≤ 20W	


LED Flexible Strips (Low Voltage)

LED 柔性灯条(低压)

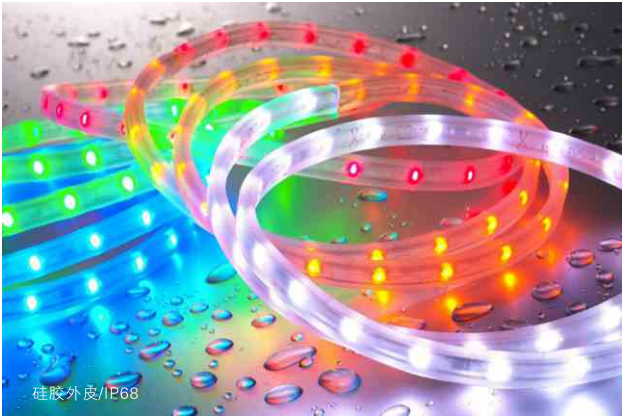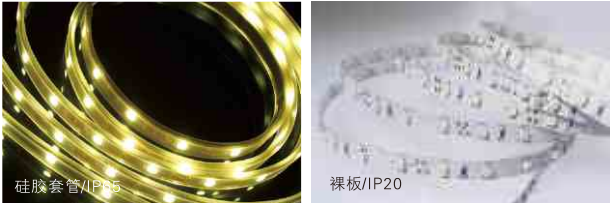

PRODUCT PARAMETERS

产品参数



Articel NO. 产品型号	PCB Size	Voltage 工作电压	Min.Cutting Length 单元长度	Max connection length 最大连接长度	Color 光色	LED Q'ty/m LED数量	W/m 最大功率	Process
EML-LFS-2835/30L-WW	6/8mm	DC12/24V	10/16.7cm	1000cm	R/G/B P/O/Y WW/W CW/NW GY/IB RGB 双色W+WW	30L	≤ 2W	裸板/IP20 PU滴胶/IP54 硅胶套管/IP65 PVC外皮/IP67 硅胶外皮/IP68
EML-LFS-2835/60L-WW	6/8mm	DC12/24V	5/10cm	800cm		60L	≤ 4W	
EML-LFS-2835/120L-WW	8mm	DC12/24V	2.5/5cm	500cm		120L	≤ 8W	
EML-LFS-2835/240L-WW	15mm	DC24V	5/10cm	500cm		240L	≤ 16W	
EML-LFS-3020/30L-WW	8mm	DC12V	10cm	800cm	WW/W CW/NW GY/Y W+WW	30L	≤ 3W	Bare plate/IP20 PU Drops of glue/IP54 Silicone tube/IP65 PVC Shell/IP67 Silicone Shell/IP68
EML-LFS-3020/60L-WW	8mm	DC12/24V	5/10cm	500cm		60L	≤ 6W	
EML-LFS-3020/120L-WW	8mm	DC12/24V	2.5/5cm	500cm		120L	≤ 12W	
EML-LFS-3014/30L-WW	8mm	DC12V	10cm	800cm	WW/W CW/NW GY/Y W+WW	30L	≤ 3W	Bare plate/IP20 PU Drops of glue/IP54 Silicone tube/IP65 PVC Shell/IP67 Silicone Shell/IP68
EML-LFS-3014/60L-WW	8mm	DC12/24V	5/10cm	500cm		60L	≤ 6W	
EML-LFS-3014/120L-WW	8mm	DC12/24V	2.5/5cm	500cm		120L	≤ 12W	

Low voltage LED Flexible strips Product naming rules LED低压柔性灯条产品命名规则

EML	LFS	5050	60L	WW	DC12V
优明灯饰 eumin light	柔性灯条 Flexible strips	光源型号 LED type	灯珠数量 q'ty/m	光色 Color	工作电压 voltage

LED Flexible Strips (RGB Pixel)

LED 柔性幻彩灯条

Product features

The LED digital animation soft strip light takes the advanced semiconductor lighting system, and is a new generation of green and high-tech product. It takes SMD high-brightness LED and intelligent driver control technology, which not only maintains beautiful color of led light strips, but also adds the digital control function.

The surface is covered by awaterproof silicon gel casing which is with good flexibility and can be bent to form a large circle with the diameter of 2 meters, thereby more facilitating the installation and operation of the construction side, meanwhile, appearing better and more beautiful than any traditional guardrail contour tube in the effect

The light source adopts chip LED, is with a lareg emitting angle, uniform color blending and a long service life, and can be put to use the monochromatic LED or RGB led, to achieve different iffects.

Have high stability, and adopt constant current drive and static scanning chip, to ensure stablith of the light;

Have low power consumption, DC12V low-voltage power supply, as well as safe and reliable work status.

Convenient for comnection, safe and reliable, as well as the adoption of waterproof connectors and flexible connecting lines, to make the installation fast and convenient.

Applicable scopes: building decoration brightening, advertising signboards, graphic pixel screens, stage backgrounds, dark groove decoration and other occasions.



LED Flexible Strips (RGB Pixel)

LED 柔性幻彩灯条



PRODUCT PARAMETERS

产品参数



Articel NO. 产品型号	PCB Size	Voltage 工作电压	Min.Cutting Length 单元长度	Max connection length 最大连接长度	Color 光色	LED Q'ty/m LED数量	W/m 最大功率	Process
EML-LFS-RGB5050-24L/8P-TTL	10mm	DC12V	12.5cm	800cm	RGB W/WW B/IB Y/GY	24L	≤ 5W	裸板/IP20 PU滴胶/IP54 硅胶套管/IP65 PVC外皮/IP67 硅胶外皮/IP68
EML-LFS-RGB5050-30L/10P-TTL	10mm	DC12V	10cm	500cm		30L	≤ 6W	
EML-LFS-RGB5050-48L/16P-TTL	10mm	DC12V	6.25cm	500cm		48L	≤ 10W	
EML-LFS-RGB5050-60L/20P-TTL	10mm	DC12V	5cm	500cm		60L	≤ 12W	
EML-LFS-RGB5050-72L/12P-TTL	15mm	DC12V	8.3cm	400cm		72L	≤ 14W	
EML-LFS-RGB5050-90L/30P-TTL	30mm	DC12V	3.33cm	300cm		90L	≤ 18W	
EML-LFS-RGBW5050-30L/10P-TTL	10mm	DC12V	10cm	500cm	四基色 RGB+W RGB+WW	30L	≤ 6W	Bare plate/IP20 PU Drops of glue/IP54 Silicone tube/IP65 PVC Shell/IP67 Silicone Shell/IP68
EML-LFS-RGBW5050-48L/16P-TTL	10mm	DC12V	6.25cm	500cm		48L	≤ 10W	
EML-LFS-RGBW5050-48L/8P-TTL	10mm	DC24V	12.5cm	500cm		48L	≤ 10W	

备注：TTL控制信号传输所使用的IC为"常规串联芯片"及"断点续传芯片"两种。
Remark: the IC used in TTL control signal transmission is "conventional tandem chip" and "breakpoint relay chip".

PRODUCT PARAMETERS

产品参数



Articel NO. 产品型号	PCB Size	Voltage 工作电压	Min.Cutting Length 单元长度	Max connection length 最大连接长度	Color 光色	LED Q'ty/m LED数量	W/m 最大功率	Process
EML-LFS-RGB5050-30L/10P-DMX	10mm	DC12V	10cm	500cm	RGB W/WW B/IB Y/GY	30L	≤ 6W	裸板/IP20 PU滴胶/IP54 硅胶套管/IP65 PVC外皮/IP67 硅胶外皮/IP68
EML-LFS-RGB5050-48L/16P-DMX	10mm	DC12/24V	6.25cm	500cm		48L	≤ 10W	
EML-LFS-RGB5050-60L/20P-DMX	10mm	DC12/24V	5cm	500cm		60L	≤ 12W	
EML-LFS-RGBW5050-30L/10P-DMX	10mm	DC12V	10cm	500cm	四基色 RGB+W RGB+WW	30L	≤ 6W	Bare plate/IP20 PU Drops of glue/IP54 Silicone tube/IP65 PVC Shell/IP67 Silicone Shell/IP68
EML-LFS-RGBW5050-48L/16P-DMX	10mm	DC12V	6.25cm	500cm		48L	≤ 10W	
EML-LFS-RGBW5050-48L/8P-DMX	10mm	DC24V	12.5cm	500cm		48L	≤ 10W	

LED RGB PIXEL Flexible strips Product naming rules LED柔性幻彩灯条产品命名规则

EML

优明灯饰
eumin light

LFS

柔性灯条
Flexible strips

RGB5050

光源型号 LED type
LED RGB(RGBW)5050
LED RGB3535

48L

灯珠数量
q'ty/m

16P

像素点/米
Pixel/m

DMX(TTL)

控制方式 Control mode
DMX512(TTL)

LED Flexible Strips (RGB Pixel)

LED 柔性幻彩灯条



60L/RGBW5050内置芯片四基色幻彩灯条
60L/RGBW 5050 built-in chip four primary color strip light



144L/RGBW5050内置芯片四基色幻彩灯条
144L/RGBW 5050 built-in chip four primary color strip light

PRODUCT PARAMETERS

产品参数




Articel NO. 产品型号	PCB Size	Voltage 工作电压	Min.Cutting Length 单元长度	Max connection length 最大连接长度	Color 光色	LED Q'ty/m LED数量	W/m 最大功率	Process
EML-LFS-RGBW5050-30L/30P-TTL	10mm	DC5V	3.33cm	400cm	四基色 RGBW	30L	≤ 8W	裸板/IP20
EML-LFS-RGBW5050-48L/48P-TTL	10mm	DC5V	2.08cm	300cm		48L	≤ 12W	PU滴胶/IP54
EML-LFS-RGBW5050-60L/60P-TTL	10mm	DC5V	1.67cm	200cm		60L	≤ 15W	硅胶套管/IP65
EML-LFS-RGBW5050-144L/144P-TTL	10mm	DC5V	0.67cm	100cm		144L	≤ 36W	PVC外皮/IP67 硅胶外皮/IP68

备注：TTL控制信号传输所使用的IC为“常规串联芯片”及“断点续传芯片”两种。
Remark: the IC used in TTL control signal transmission is "conventional tandem chip" and "breakpoint relay chip".

LED Flexible Strips (RGB Pixel)

LED 柔性幻彩灯条

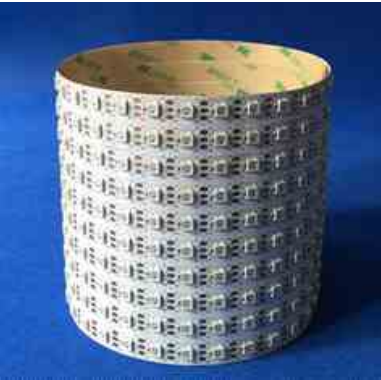


60L/RGB5050内置芯片全彩灯条
60L/RGBW 5050 built-in chip full color strip light



48L/RGB3535内置芯片全彩灯条(S型)
48L/RGBW 3535 built-in chip full color strip light

PRODUCT PARAMETERS

产品参数




Articel NO. 产品型号	PCB Size	Voltage 工作电压	Min.Cutting Length 单元长度	Max connection length 最大连接长度	Color 光色	LED Q'ty/m LED数量	W/m 最大功率	Process
EML-LFS-RGB5050-30L/30P-TTL	10mm	DC5V	3.33cm	400cm	三基色 RGB	30L	≤ 8W	裸板/IP20
EML-LFS-RGB5050-48L/48P-TTL	10mm	DC5V	2.08cm	300cm		48L	≤ 12W	PU滴胶/IP54
EML-LFS-RGB5050-60L/60P-TTL	10mm	DC5V	1.67cm	200cm		60L	≤ 15W	硅胶套管/IP65
EML-LFS-RGB5050-96/96P-TTL	10mm	DC5V	1.04cm	150cm		96L	≤ 24W	PVC外皮/IP67
EML-LFS-RGB5050-144L/144P-TTL	10mm	DC5V	0.67cm	100cm		144L	≤ 36W	硅胶外皮/IP68
EML-LFS-RGB3535-30L/30P-TTL	5/8mm	DC5V	3.33cm	400cm	三基色 RGB	30L	≤ 8W	Bare plate/IP20
EML-LFS-RGB3535-60L/60P-TTL	5/8mm	DC5V	1.67cm	200cm		60L	≤ 15W	PU Drops of glue/IP54
EML-LFS-RGB3535-144L/144P-TTL	5/8mm	DC5V	0.67cm	100cm		144L	≤ 36W	Silicone tube/IP65 PVC Shell/IP67 Silicone Shell/IP68

LED RGB PIXEL Flexible strips Product naming rules LED柔性幻彩灯条产品命名规则

EML	LFS	RGB5050	60L	60P	TTL	DC5V
优明灯饰 eumin light	柔性灯条 Flexible strips	光源型号 LED type LED RGB5050(3535)	灯珠数量 q'ty/m	像素点/米 Pixel/m	控制方式 Control mode	工作电压 voltage

SMD Light Strip

SMD 贴片灯带




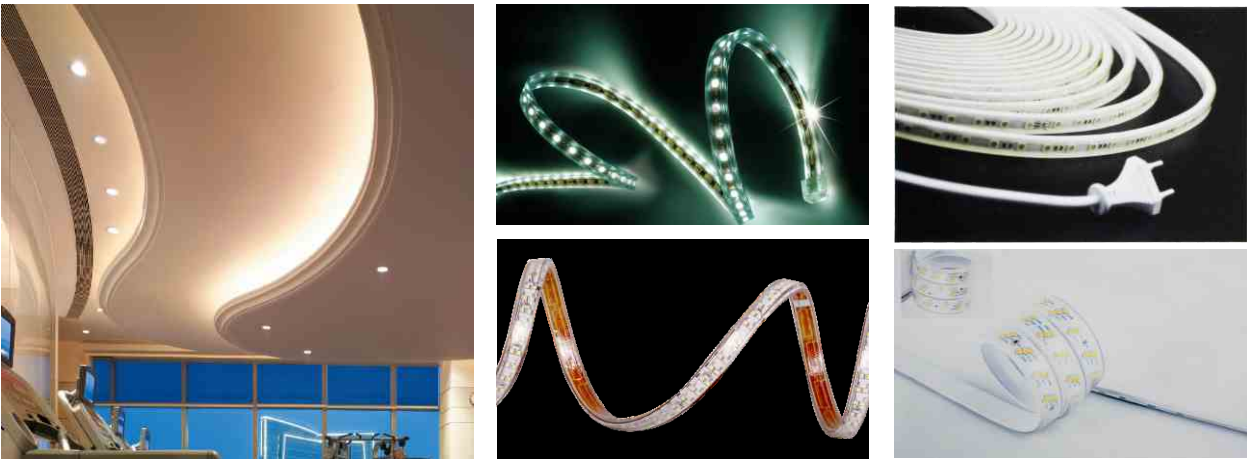


户外照明
外延照明、装饰建筑物装饰照明、标志照明、指示牌、用于路径和轮廓标志、水下工程照明。广告招牌：广告字的背光源、超薄灯箱、发光字、发光招牌。
室内装饰：高档专卖店、商场等室内商业气氛照明、汽车装饰、走廊照明、楼梯照明、隐蔽位置照明、家具装饰照明、室内暗槽、橱窗装饰。

气氛照明
酒吧、KTV咖啡厅等休闲娱乐场所的气氛渲染，美容院照明、工艺品光源。

PRODUCT PARAMETERS

产品参数

	Articel NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度	Color 光色	LED Q'ty/m LED数量	W/m 最大功率	Process
 EML-HVS01	EML-HVS01-2835/60L-W	8*11	AC240/110V DC24/12V	100/50cm 10/5cm	WW/W CW/NW GY/IB	60L	≤ 4W	PVC外皮/IP65 硅胶外皮/IP68
	EML-HVS01-2835/120L-W					120L	≤ 8W	
	EML-HVS01-3014/120L-W					120L	≤ 8W	
 EML-HVS02	EML-HVS02-5050/60L-W	8*15	AC240/110V DC24/12V	100/50cm 10/5cm	WW/W CW/NW GY/IB RGB 双色W+WW	60L	≤ 8W	
	EML-HVS02-2835/60L-W					60L	≤ 4W	
	EML-HVS02-2835/120L-W					120L	≤ 8W	
 EML-HVS03	EML-HVS03-5050/60L-W	8*18	AC240/110V DC24/12V	100/50cm 10/5cm	WW/W CW/NW GY/IB RGB WW+B 双色W+WW	60L	≤ 8W	
	EML-HVS03-2835/120L-W					120L	≤ 8W	
	EML-HVS03-2835/180L-W					180L	≤ 12W	
	EML-HVS03-5630/72L-W					72L	≤ 8W	
	EML-HVS03-5630/120L-W					120L	≤ 15W	
 EML-HVS04	EML-HVS04-5050/72L-W	12*22	AC240/110V DC24/12V	100/50cm 10/5cm	WW/W CW/NW GY/IB RGB WW+B 双色W+WW	72L	≤ 8W	
	EML-HVS04-2835/180L-W					180L	≤ 12W	
	EML-HVS04-5630/120L-W					120L	≤ 15W	

备注：RGB七彩变色灯带需4条铜导线
Note: 4 copper wires are required for RGB discoloration light.

SMD Light Strip


SMD 贴片灯带



OUTDOOR LIGHTTING
Lighting, extension of decorative building decoration lighting, marks of lighting,signs, lighting for path and contour marks, underwater lighting project; Advertising signs; advertising word back light, ultra-thin light boxes, luminous characters, luminous signs. Interior decoration: luxury specialty stores, shopping malls and other commercial atmosphere of indoor lighting, car decoration, corridor lighting,stairs lighting, concealed location lighting, furniiture decorative lighting, dark slot, shopwindow decoration

MOOD LIGHTING

Bar, KTV, Coffee hall and other leisure entertainment atmosphere rendering, beauty salon, arts and crafts lighting light source.

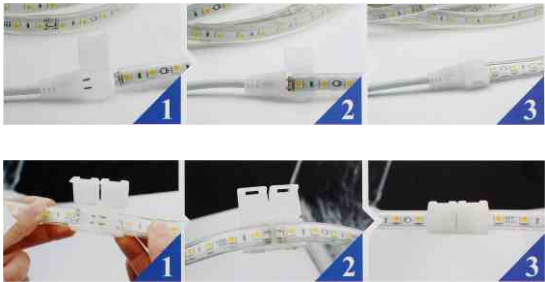

无导线灯带前接头、中间接头安装使用示意图
No wire lamp with front connector、The intermediate connector is installed with a schematic diagram.

PRODUCT PARAMETERS

产品参数

	Articel NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度	Color 光色	LED Q'ty/m LED数量	W/m 最大功率	Process
 EML-HVS05	EML-HVS05-2835/60L-W-NC	7*11	AC240/110V DC24/12V	100/50cm 10/5cm	WW/W CW/NW GY/IB	60L	≤ 4W	PVC外皮/IP65 硅胶外皮/IP68
	EML-HVS05-2835/120L-W-NC					120L	≤ 8W	
	EML-HVS05-3014/60L-W-NC					60L	≤ 4W	
 EML-HVS06	EML-HVS06-5050/60L-W-NC	7*15	AC240/110V DC24/12V	100/50cm 10/5cm	R/G/B P/O/Y WW/W CW/NW GY/IB	60L	≤ 8W	PVC Shell/IP65 Silicone Shell/IP68
	EML-HVS06-2835/60L-W-NC					60L	≤ 4W	
	EML-HVS06-2835/120L-W-NC					120L	≤ 8W	
	EML-HVS06-5630/72L-W-NC					72L	≤ 8W	
	EML-HVS06-5630/120L-W-NC					120L	≤ 15W	

High voltage LED SMD Light Strip Product naming rules LED贴片灯带产品命名规则

EML

HVS06

5050

60L

W

NC

优明灯饰
eumin light

贴片灯带06款
SMD Light Strip 06

光源型号
LED type


灯珠数量
q'ty/m

光色
Color

无铜导线
No copper conductor


SMD Light Strip

SMD 贴片灯带

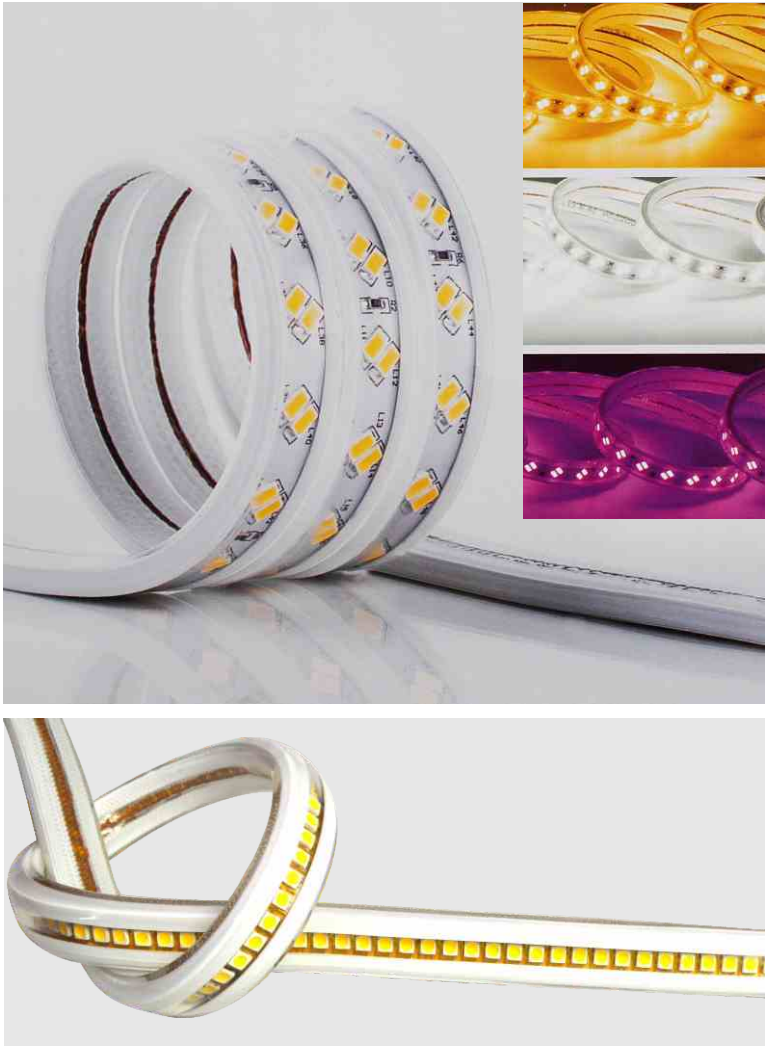

PRODUCT PARAMETERS

产品参数



	Articel NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度	Color 光色	LED Q'ty/m LED数量	W/m 最大功率	Process
 EML-HVS07	EML-HVS07-2835/60L-W-DC	8*16	AC240/110V DC24/12V	100/50cm 10/5cm	WW/W CW/NW GY/IB	60L	≤ 4W	PVC外皮/IP65 硅胶外皮/IP68
	EML-HVS07-2835/120L-W-DC					120L	≤ 8W	
	EML-HVS07-5050/60L-W-DC					60L	≤ 8W	
	EML-HVS07-3014/120L-W-DC					120L	≤ 8W	
 EML-HVS08	EML-HVS08-5050/60L-W-DC	8*18	AC240/110V DC24/12V	100/50cm 10/5cm	WW/W CW/NW GY/IB RGB 双色W+WW	60L	≤ 8W	PVC Shell/IP65 Silicone Shell/IP68
	EML-HVS08-2835/120L-W-DC					120L	≤ 8W	
	EML-HVS08-2835/180L-W-DC					180L	≤ 12W	
	EML-HVS08-5630/72L-W-DC					72L	≤ 8W	
	EML-HVS08-5630/120L-W-DC					120L	≤ 15W	

备注：RGB七彩变色灯带需4条铜导线
Note: 4 copper wires are required for RGB discoloration light.


SMD Light Strip

SMD 贴片灯带



PRODUCT PARAMETERS

产品参数



	Articel NO. 产品型号	Size(mm) 尺寸	Voltage 工作电压	Min.Cutting Length 单元长度	Color 光色	LED Q'ty/m LED数量	W/m 最大功率	Process
 EML-HVS09	EML-HVS09-5050/72L-W-DC	12*22	AC240/110V DC24/12V	100/50cm 10/5cm	WW/W CW/NW GY/IB RGB WW+B 双色W+WW	72L	≤ 8W	PVC外皮/IP65 硅胶外皮/IP68
	EML-HVS09-2835/180L-W-DC					180L	≤ 12W	
	EML-HVS09-5630/120L-W-DC					120L	≤ 15W	

Double color shell LED SMD Light Strip Product naming rules 双色外皮LED贴片灯带产品命名规则

EML

HVS09

5630

120L

W

DC

优明灯饰
eumin light

贴片灯带09款
SMD Light Strip 09

光源型号
LED type

灯珠数量
q'ty/m

光色
Color

双色外皮
Double color shell