


LED Starshine Light
LED 星光灯(灯串)



EML-SSL30A




EML-SSL40A



EML-SSL50A



EML-SSL4040A



EML-SSL5050A



EML-SSL6425A



EML-SSL80A



EML-SSL100A



EML-SSL138A

PRODUCT PARAMETERS
产品参数


Articel NO. 产品型号	Size	Voltage 工作电压	Control mode	Angle	Color 光色	LED Q'ty/m LED数量	W/m 最大功率	IP Riting
EML-SSL30A-5050RGB-3L(4L)	30mm	DC12V	单色常亮 Always light	≥ 160°	R/G Y/B W/P PP/WW CW/NW RGB RGBW	3/4L	≤ 0.8W	IP65 IP67
EML-SSL40A-5050RGB-6L	40mm	DC24V				6L	≤ 1.5W	
EML-SSL50A-5050RGB-6L(7L)	50mm	DC24V				6/7L	≤ 1.5W	
EML-SSL4040A-5050RGB-6L	40*40mm	DC24V				6L	≤ 1.5W	
EML-SSL5050A-5050RGB-7L	50*50mm	DC24V	国际标准 DMX512			7L	≤ 1.5W	
EML-SSL6425A-5050RGB-4L(6L)	64*25mm	DC24V	TTL 信号传输			4/6L	≤ 1.5W	
EML-SSL80A-5050RGB-12L	80mm	DC24V				12L	≤ 3W	
EML-SSL100A-5050RGB-18L	100mm	DC24V				18L	≤ 4.5W	
EML-SSL138A-5050RGB-21L	138mm	DC24V				21L	≤ 5W	

备注：发光面罩有带透镜角度、乳白、透明、水晶钻石面可选。
Note: the mask has lens Angle, milky white, transparent, crystal diamond face optional.


LED Mini Ground Light(Deck Lights)
LED 迷你地理灯(甲板灯)




No.:EML-DL01-W3L-DC12V
Power:0.2W/0.7W
Color:R/G/B/Y/W/WW/P/RGB



No.:EML-DL02-W3L-DC12V
Power:0.2W/0.7W
Color:R/G/B/Y/W/WW/P/RGB



Application:
LED Deck Lighting Kit are popular for the small size of light which can be made for garden, Kitchen, and deck lighting applications. Low energy consumption makes them a practical choice where lighting is switched on regularly for long periods and low-energy sustainable garden lighting is required.

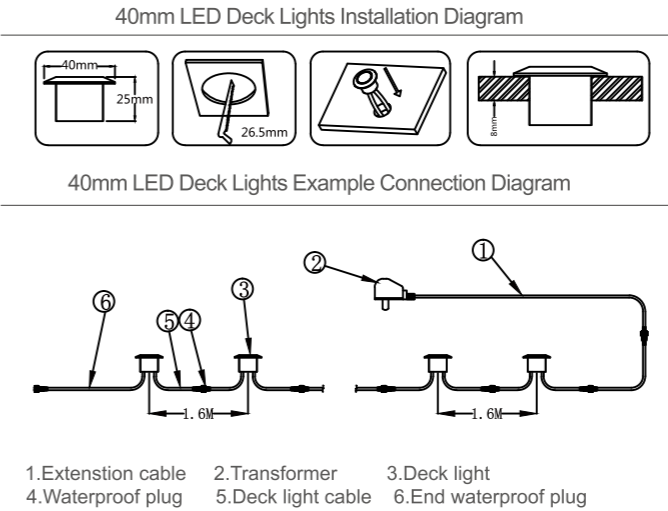

The certification of UL power adapter
(DC12V/600mA: Load15-20PCS
DC12V/1A:Load20-30PCS)



LED Ground Light

LED地面灯

- 产品用途
适用于公园、广场、庭院、绿地、步行街、雕塑、建筑物等场所投光照明。
- 产品特性
 - 不锈钢面盖，加强钢化玻璃，可承载重压。
 - 压铸铝灯体，表面聚酯粉末喷涂处理，具有抗冲击、耐腐蚀的优点。
 - 多层防水、防潮处理，灯板和光源用透明硅树脂封固，防护等级为IP67。
- Product usage
Applicable to the park, square, garden, green space, pedestrian street, the sculpture, the building and so on illumination.
- Product features
 - Stainless steel surface cover, strengthening of toughened glass, carry weight.
 - Die-casting aluminum lamp body, the surface of polyester powder coating process, possesses the advantages of shock resistance, corrosion resistance.
 - Multi-layer waterproof, moistureproof processing, light board and light with transparent silicone sealing, protection grade is Ip67.

Input Voltage: DC12V/DC24V
Material: ALM+ Tempered glass
Ip Rating: IP67
LED Life:>30000h
LED chip: CREE/OSRAM
Beam Angle:5°, 8°, 12°, 15°25°, 45°, 60°, 90°
8x45°, 20x45°, 10x60°, 10x75°
Operating Temperature:-25°C~+50°C
Control mode: Constant current driver
DMX512 Control
Color: R/G/B/Y/W/WW/P/RGB/RGBW
CRI: Ra>80
Power Factor:≥0.91



A B C

EML-GL01A-24V
Size:Φ42*68mm
Power:1*1W/3*0.2W



A B C

EML-GL02A-24V
Size:Φ52*68mm
Power:1*1W/1*3W



A B C

EML-GL03A-24V
Size:Φ62*73mm
Power:3*1W/1*3W



EML-GL04-24V
Size:Φ52*90mm
Power:1*1W/1*3W



EML-GL05-24V
Size:Φ65*90mm
Power:1*1W/1*3W



EML-GL06-24V
Size:Φ105*90mm
Power:3*1W/3*2W



LED Ground Light

LED地面灯



EML-GL07-24V
Size:Φ100*80mm
Power:3*1W/3*2W



EML-GL08-24V
Size:Φ120*95mm
Power:6*1W



EML-GL09-24V
Size:Φ180*95mm
Power:12*1W



A



B

EML-GL10A-24V
Size:Φ130*105mm
Power:3*1W/3*2W

EML-GL10B-24V
Size:Φ130*105mm
Power:5/7W



A



B

EML-GL11A-24V
Size:Φ160*120mm
Power:7*1W/7*2W


EML-GL11B-24V
Size:Φ160*120mm
Power:7/10W



EML-GL12-24V
Size:L530*W210*H50mm
Power:36*1W/24*2W



EML-GL13-24V
Size:L500*W180*H50mm
Power:24*1W/18*2W



EML-GL14A-24V
Size:L500*W90*H110mm
Power:12*1W/12*2W/18*1W



EML-GL14B-24V
Size:L1000*W90*H110mm
Power:24*1W/24*2W/36*1W



EML-GL15A-24V
Size:L500*W30*H78mm
Power:30*0.2W

EML-GL15B-24V
Size:L1000*W30*H78mm
Power:60*0.2W



LED High Power Linear Wall Washing Light


LED 大功率线型洗墙灯

产品特性:


- 灯体采用高强度 6063 高导热铝型材造型新颖。
- 主要用于建筑立面照明。
- 透光罩采用钢化玻璃，抗击耐磨，透光率>96。
- 光源采用高品质LED，可单色或三基色选择
- 可进行DMX512控制，实现1670万种色彩变化。
- 一体化散热结构设计，保证灯具使用寿命。
- 内置高效电源，电能转换率更高。
- 人性化设计，适合多种应该用场需求。

Product features


- High strength die-casting aluminum lamp body of material, modeling is novel, fashion
- Mainly used for building facade lighting
- Pervious to light cover, USES toughende glass,the fight against wear, light transmittance>96%
- The light source adopts high qualith LED, could choose single color or three-primary colors
- DMX512 control can be performed, achieve 16.7 million species of color changes
- Integrated heat dissipation structure design, ensure the service life of the lights
- Built-in high efficiency power supply, power conversion rate is higher
- Humanized design, suitable for a variety of applications




EML-HXQ01-1802
Size:L1000*W35*H28mm
Power:18*1W/18*1.5W
Voltage:DC24V

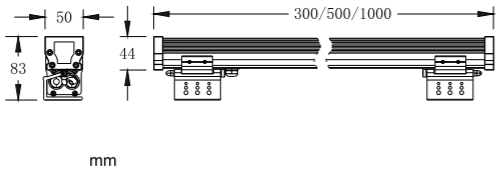

EML-HXQ02-1802
Size:L1000*W50*H44mm
Power:18*1W/18*1.5W/24*1W
Voltage:DC24V

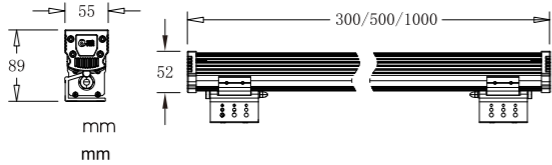

EML-HXQ03-2401
Size:L1000*W55*H52mm
Power:24*1W/24*1.5W/36*1W
Voltage:DC24V/AC90-265V




EML-HXQ04-3602
Size:L1000*W68*H113mm
Power:24*3W/36*1.5W/48*1W
Voltage:DC24V/AC90-265V

备注：此系列产品可以根据应用场合建筑物表面颜色喷涂相对应接近的外壳颜色；另有不同的固定安装支架、防眩光遮光罩可选。
Note: this series of products can be painted on the surface of the building on the surface of the application. Different fixed mounting bracket, anti-glare light hood can be selected.


LED High Power Linear Wall Washing Light

Structure Waterproof Technology.
LED 大功率线型洗墙灯(结构防水工艺)


Input Voltage: DC24V/AC90-265V
Material: ALM+ Tempered glass
Ip Rating: IP65
LED Life:>30000h
LED chip: CREE/OSRAM
Beam Angle:5°,8°,12°,15°25°,45°,60°,90°
8x45°,20x45°,10x60°,10x75°
Operating Temperature:-25°C~+50°C
Control mode: Constant current driver
DMX512 Control
Color: R/G/B/Y/W/WW/P/RGB/RGBW
CRI: Ra>80
Power Factor:≥0.91





EML-HXQ05-1801
Size:L1000*W48*H25mm
Power:18*1W/24*1W
Voltage:DC24V

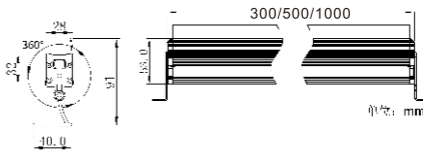


EML-HXQ06-1802
Size:L1000*W28*H32mm
Power:18*1W/18*1.5W
Voltage:DC24V

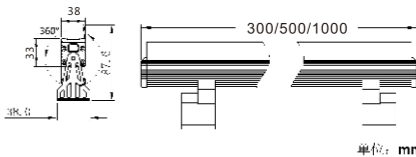

EML-HXQ07-2401
Size:L1000*W38*H33mm
Power:24*1W/24*1.5W
Voltage:DC24V

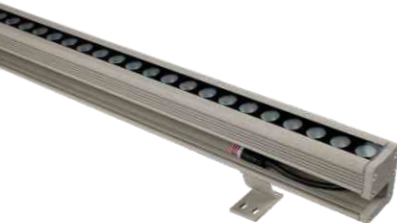


EML-HXQ08-3601
Size:L1000*W48*H68mm
Power:36*1W/24*2W
Voltage:DC24V

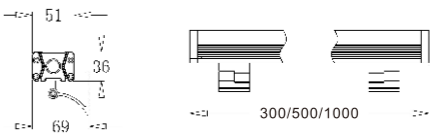


EML-HXQ09-3601
Size:L1000*W51*H36mm
Power:36*1W/24*2W
Voltage:DC24V/AC90-265V


SMD高亮度线型洗墙灯




EML-LXQ01-48L/60L
Size:L1000*W18*H14mm
Power:8W/12W、10W/15W
Voltage:DC24V




EML-LXQ02-48L+18L
Size:L1000*W52*H45mm
Power:8W+12W、12W+18W
Voltage:DC24V

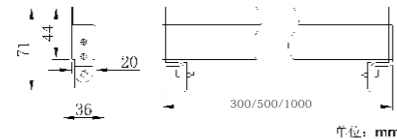

EML-LXQ03-48L
Size:L1000*W20*H44mm
Power:8W/10W/12W
Voltage:DC24V

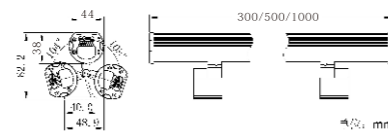


EML-LXQ04-48L/56L/60L/84L
Size:L1000*W44*H38mm
Power:8W/10W/12W/15W/18W
Voltage:DC24V




EML-LXQ05-48L/60L
Size:L1000*W36*H20mm
Power:8W/12W、10W/15W
Voltage:DC24V

备注：此系列产品可以根据应用场合建筑物表面颜色喷涂相对应接近的外壳颜色；另有不同的固定安装支架、防眩光遮光罩可选。

SMD高亮铝线条灯





EML-LXT01-48L/56L/60L
Size:L1000*W35*H31mm
Power:8W/10W/12W/15W
Voltage:DC24V




EML-LXT02-48L/56L/60L/84L
Size:L1000*W38*H36mm
Power:8W/10W/12W/15W/18W
Voltage:DC24V



EML-LXT03-48L/56L/60L
Size:L1000*W30*H41mm
Power:8W/10W/12W/15W
Voltage:DC24V

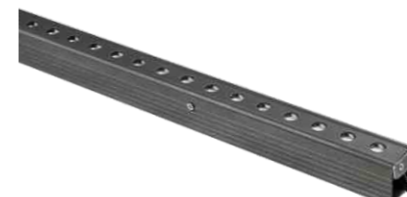

EML-LXT04-48L
Size:L1000*W25*H31mm
Power:8W/10W/12W
Voltage:DC24V



EML-LXT05-48L
Size:L1000*W30*H33mm
Power:8W/10W/12W
Voltage:DC24V

Narrow Angle LED Spot Light

窄角度LED投射灯(3°/4°)



EML-TSL01A-605
Size:L200*W168*H89mm
Power:24W

EML-TSL01B-805
Size:L200*W168*H89mm
Power:30W

EML-TSL01C-1205
Size:L355*W168*H89mm
Power:50W

EML-TSL01D-2005
Size:L500*W168*H89mm
Power:80W

EML-TSL01E-2405
Size:L685*W168*H89mm
Power:100W

EML-TSL01F-4005
Size:L1000*W168*H89mm
Power:160W/200W



EML-TSL02A-1005
Size:L217*W155*H49mm
Power:24W

EML-TSL02B-605
Size:L355*W155*H49mm
Power:40W

EML-TSL02C-1405
Size:L514*W155*H49mm
Power:56W

EML-TSL02D-2805
Size:L1000*W155*H49mm
Power:108W

窄角度投光灯可实现灯光远程投射，而且无眩光和消除了光污染的现象。主要用于古建筑，桥梁，景观，雕塑，高层建筑等需要这样远程投射及重点照明的场所。

Small angle spot light can realize the remote projection , it also solves the problem of glare and is environmentfriendly .
Currently this spot light mainly used for the place where needs remote projection and focus lighting,
such as ancient buildings, bridges, landscapes, sculptures, high-rise buildings




备注：如需更远程投射灯光或需要更高照度更亮的场合，可选择使用双头产品。
Note: if you need more remote projection lighting or brighter lighting, you can use double-headed products.



Narrow Angle LED Spot Light

窄角度LED投射灯(3°/4°)

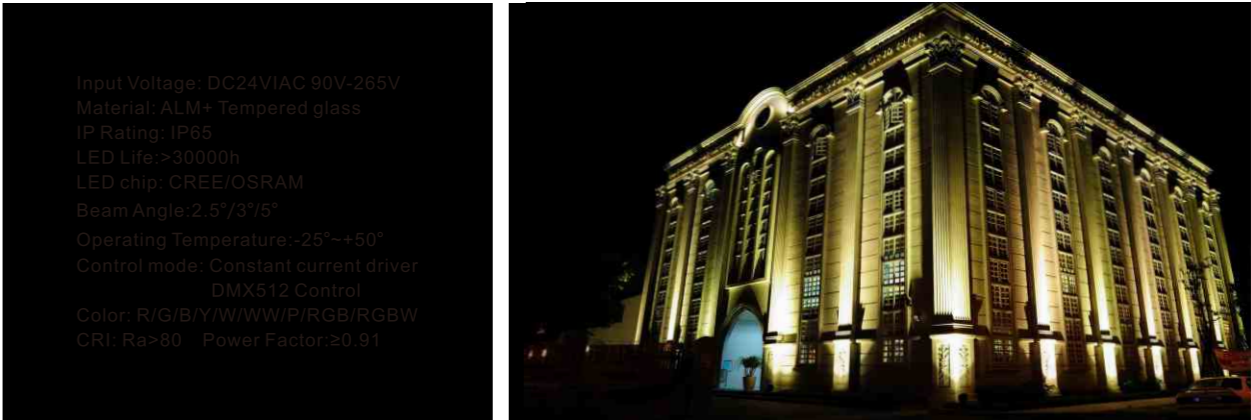

Input Voltage: DC24V/AC 90V-265V
Material: ALM+ Tempered glass
IP Rating: IP65
LED Life:>30000h
LED chip: CREE/OSRAM
Beam Angle:2.5°/3°/5°
Operating Temperature:-25°~+50°
Control mode: Constant current driver
DMX512 Control
Color: R/G/B/Y/W/WW/P/RGB/RGBW
CRI: Ra>80 Power Factor:≥0.91



EML-TSL03A/B-905
Size:L170*W170*H260mm
Power:40W/50W

EML-TSL04A/B-1605
Size:L213*W213*H260mm
Power:60W/80W

EML-TSL05-905
Size:L160*W160*H160mm
Power:40W/50W



EML-TSL06-1802
Size:Φ210*H145mm
Power:18W/36W

EML-TSL07-2702
Size:Φ250*H150mm
Power:28W/56W

EML-TSL08-1605
Size:L200*W200*H200mm
Power:60W/80W





EML-TSL09-3005
Power:100W

EML-TSL10-3010
Power:150W/180W

EML-TSL11-8405
Power:250W/300W


EML-TSL12-8410
Power:500W

Narrow Angle LED Spot Light (1°/2°/5°~15°)
窄角度LED投射灯(1°/2°/5°~15°)



Input Voltage: DC24VIAC 90v-265v
Material: ALM+ Tempered glass
IP Rating: IP65
LED Life:>30000h
LED chip: CREE/OSRAM
Beam Angle:1° /2° /5° ~15
Operating Temperature:-30℃~+50℃
Control mode: Constant current driver
DMX512 Control
Color: R/G/B/Y/W/WW/P/RGB/RGBW
CRI: Ra>80 Power Factor:≥0.91

5米高墙面
各种配光透镜光效
5 meters high
Various light distribution
lens light effect

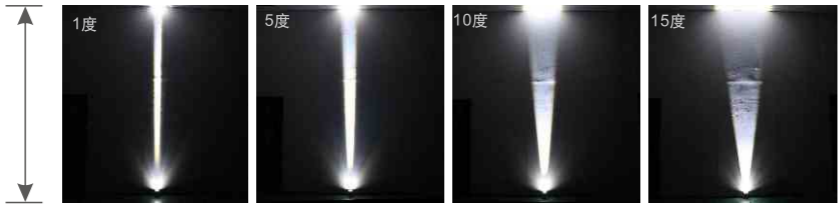



EML-TSL13-0110
Size:L88*W88*H130mm
Power:10W



EML-TSL14-0150
Size:L190*W140*H210mm
Power:50W



EML-TSL15-01100
Size:L240*W190*H250mm
Power:100W



EML-TSL16-0120
Size:L125*W125*H120mm
Power:20W




EML-TSL17-0805
Size:L162*W96*H134mm
Power:30W



窄角度投光灯可实现灯光远程投射，而且无眩光和消除了光污染的现象。主要用于古建筑，桥梁，景观，雕塑，高层建筑等需要这样远程投射及重点照明的场所。窄角度投光灯可实现灯光远程投射，而且无眩光和消除了光污染的现象。主要用于古建筑，桥梁，景观，雕塑，高层建筑等需要这样远程投射及重点照明的场所。

Small angle spot light can realize the remote projection , it also solves the problem of glare and is environmentfriendly .Currently this spot light mainly used for the place where needs remote projection and focus lighting, such as ancient buildings, bridges, landscapes, sculptures, high-rise buildings

Large Angle LED Spot Light
大角度LED投光灯



Input Voltage: DC24VIAC 90v-265v
Material: ALM+ Tempered glass
Ip Rating: IP65
LED Life:>30000h
LED chip: CREE/OSRAM
Beam Angle:10° /15° /25° /36° /60° /90°
Operating Temperature:-25℃~+50℃
Control mode: Constant current driver
DMX512 Control
Color: R/G/B/Y/W/WW/P/RGB/RGBW
CRI: Ra>80 Power Factor:≥0.91



EML-TSL18-0110
Size:L99*W99*H114mm
Power:10W/20W



EML-TSL19-0150
Size:Φ210*H235mm
Power:50W



EML-TSL20-0110
Size:Φ98*H150mm
Power:1W



EML-TSL21-0110
Size:Φ90*H112mm
Power:10W



EML-TSL22-0120
Size:Φ115*H135mm
Power:20W



EML-TSL23-0130
Size:Φ150*H168mm
Power:30W



EML-TSL24-0120
Size:L125*W125*H110mm
Power:20W



EML-TSL25-0130
Size:L145*W145*H110mm
Power:30W



EML-TSL26-0150
Size:L185*W185*H177mm
Power:50W

Large Angle LED Spot Light
大角度LED投射灯



EML-TSL27-0110
Size:Φ100*H90mm
Power:10W/7W



EML-TSL28-0120
Size:Φ150*H110mm
Power:15W/20W



EML-TSL29-0130
Size:Φ180*H120mm
Power:30W



EML-TSL30-0110
Size:Φ90*H135mm
Power:10W



EML-TSL31-0120
Size:Φ115*H180mm
Power:20W



EML-TSL32-0130
Size:Φ150*H210mm
Power:30W



EML-TSL33-0110
Size:Φ93*H145mm
Power:10W/12W



EML-TSL34-0115
Size:Φ115*H170mm
Power:15W/10W



EML-TSL35-0120
Size:Φ150*H165mm
Power:20W



EML-TSL36A-0110
Size:Φ93*H110mm
Power:10W/12W



EML-TSL36B-0110
Size:Φ93*H150mm
Power:10W/12W



EML-TSL37A-0120
Size:Φ125*H145mm
Power:20W/25W




EML-TSL37B-0120
Size:Φ125*H210mm
Power:20W/25W

Large Angle LED Project-light
大角度LED投光灯

LED投光灯是指被照物体表面上的照度高于周围环境的灯具，
又称聚光灯；它能够投向任何方向,并具备不受气候条件影响的
结构。
主要用于大面积作业场矿、建筑物轮廓、体育场、立交桥、
纪念碑、公园和花坛等；因此几乎所有室外用的大面积照明
灯具都可称作投光灯。


Input Voltage: DC24V/AC 90v-265v
Material: ALM+ Tempered glass
Ip Rating: IP65
LED Life:>30000h
LED chip: CREE/OSRAM
Beam Angle:5°,8°,12°,15°25°,36°,45°,60°,90°
8x45°,20x45°,10x60°,10x75°
Operating Temperature:-25°C~+50°C
Control mode: Constant current driver
DMX512 Control
Color: R/G/B/Y/W/WW/P/RGB/RGBW
CRI: Ra>80
Power Factor:≥0.91

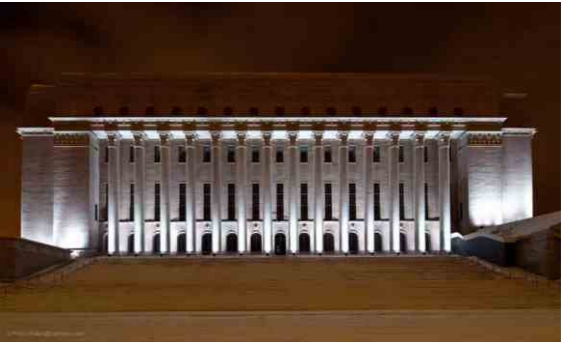

EML-TGL01A-1802
Size:L200*W168*H89mm
Power:18W/28W



EML-TGL01B-3002
Size:L300*W168*H89mm
Power:30W/48W

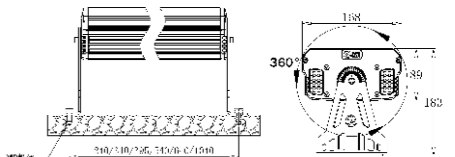


EML-TGL01C-3602
Size:L355*W168*H89mm
Power:36W/54W

EML-TGL01D-5402
Size:L500*W168*H89mm
Power:54W/72W

EML-TGL01E-7202
Size:L600*W168*H89mm
Power:72W/98W


EML-TGL01F-10802
Size:L1000*W168*H89mm
Power:144W/180W

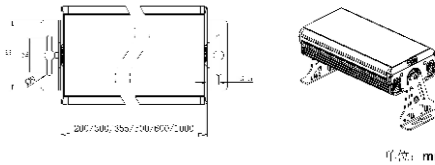

EML-TGL02A-1202
Size:L217*W155*H49mm
Power:18W



EML-TGL02B-2402
Size:L355*W155*H49mm
Power:36W

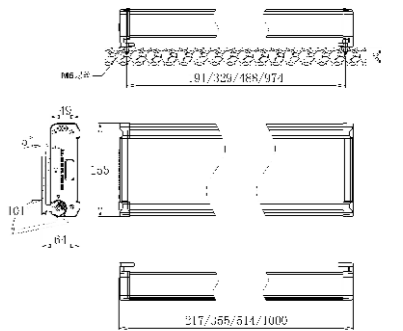

EML-TGL02C-3602
Size:L514*W155*H49mm
Power:54W

EML-TGL02D-7202
Size:L1000*W155*H49mm
Power:108W

Large Angle LED Project-light
大角度LED投光灯

产品特性:

- 灯体采用高强度压铸铝材料, 造型新颖、时尚。
- 主要用于建筑立面照明。
- 透光罩采用钢化玻璃, 抗击耐磨, 透光率>96。
- 光源采用高品质LED, 可单色或三基色选择
- 可进行DMX512控制, 实现1670万种色彩变化。
- 一体化散热结构设计, 保证灯具使用寿命。
- 内置高效电源, 电能转换率更高。
- 人性化设计, 适合多种应用场需求。

Product features

- High strength die-casting aluminum lamp body of material, modeling is novel, fashion
- Mainly used for building facade lighting
- Pervious to light cover, USES toughende glass,the fight against wear, light transmittance > 96%
- The light source adopts high qualith LED, could choose single color or three-primary colors
- DMX512 control can be performed, achieve 16.7 million species of color changes
- Integrated heat dissipation structure design, ensure the service life of the lights
- Built-in high efficiency power supply, power conversion rate is higher
- Humanized design, suitable for a variety of applications

EML-TGL03-0902
Size:L110*W108*H105mm
Power:9W/18W

EML-TGL04-2002
Size:L160*W125*H125mm
Power:20W/36W

EML-TGL05-4002
Size:L215*W160*H137mm
Power:40W/72W

EML-TGL06-1602
Size:L125*W125*H110mm
Power:16W/24W

EML-TGL07-2502
Size:L145*W145*H110mm
Power:25W/36W

EML-TGL08-3602
Size:L185*W185*H110mm
Power:36W/48W

EML-TGL09-1802
Size:L245*W205*H64mm
Power:36W

EML-TGL10-3602
Size:L310*W260*H74mm
Power:54W

EML-TGL11-7202
Size:L420*W360*H75mm
Power:108W

Large Angle LED Project-light
大角度LED投光灯

EML-TGL12A-0303
Size:L88*W88*H130mm
Power:9W

EML-TGL12B-0602
Size:L88*W88*H130mm
Power:12W

EML-TGL12C-0902
Size:L88*W88*H130mm
Power:16W

EML-TGL13A-0502
Size:L96*W96*H150mm
Power:10W

EML-TGL13B-0502
Size:L96*W96*H150mm
Power:10W

EML-TGL13C-0502
Size:L96*W96*H150mm
Power:10W

EML-TGL14A-1602
Size:L130*W130*H160mm
Power:16W/24W

EML-TGL15A-2402
Size:L170*W170*H165mm
Power:24W/36W

EML-TGL16A-3602
Size:L200*W200*H170mm
Power:36W/54W

EML-TGL14B-1602
Size:L130*W130*H160mm
Power:16W/24W

EML-TGL15B-2402
Size:L170*W170*H165mm
Power:24W/36W

Input Voltage: DC24V/AC 90v-265v
Material: ALM+ Tempered glass
Ip Rating: IP65
LED Life: >30000h
LED chip: CREE/OSRAM
Beam Angle: 5°, 8°, 12°, 15°, 25°, 45°, 60°, 90°, 8x45°, 20x45°, 10x60°, 10x75°
Operating Temperature: -25°C~+50°C
Control mode: Constant current driver
DMX512 Control
Color: R/G/B/Y/W/WW/P/RGB/RGBW
CRI: Ra>80
Power Factor: ≥0.91

Large Angle LED Project-light
大角度LED投射灯





Input Voltage: DC24V/AC 90v-265v
Material: ALM+ Tempered glass
Ip Rating: IP65
LED Life:>30000h
LED chip: CREE/OSRAM
Beam Angle: 5°, 8°, 12°, 15° 25°, 45°, 60°, 90°
8x45°, 20x45°, 10x60°, 10x75°
Operating Temperature: -25°C~+50°C
Control mode: Constant current driver
DMX512 Control
Color: R/G/B/Y/W/WW/P/RGB/RGBW
CRI: Ra>80
Power Factor:≥0.91

Large Angle LED Project-light
大角度LED投射灯




Large Angle LED Project-light
大角度LED投射灯







EML-TGL39A-0302
Size:Φ85*H150mm
Power:6W




EML-TGL39B-0602
Size:Φ130*H210mm
Power:12W




EML-TGL39C-1802
Size:Φ180*H260mm
Power:24W/36W




EML-TGL39D-3602
Size:Φ230*H400mm
Power:36W/54W







EML-TGL40A-0502
Size:Φ110*H146mm
Power:10W




EML-TGL40B-1202
Size:Φ170*H215mm
Power:12W/18W




EML-TGL40C-3601
Size:Φ206*H265mm
Power:36W




EML-TGL40D-6002
Size:Φ280*H390mm
Power:60W/90W







EML-TGL41A-0902
Size:Φ135*H200mm
Power:9W/12W




EML-TGL41B-1802
Size:Φ175*H270mm
Power:18W/24W




EML-TGL41C-3601
Size:Φ215*H300mm
Power:36W




EML-TGL41D-6001
Size:Φ245*H350mm
Power:60W







EML-TGL42A-0602
Size:Φ135*H170mm
Power:9W




EML-TGL42A-1202
Size:Φ150*H180mm
Power:12W/18W



EML-TGL42B-1802
Size:Φ180*H210mm
Power:18W/24W



EML-TGL42C-3601
Size:Φ230*H320mm
Power:24W/36W



EML-TGL42D-4801
Size:Φ290*H320mm
Power:36W/48W

Large Angle LED Project-light
大角度LED投射灯



EML-TGL43-0902
Size:Φ180*H120mm
Power:18W



EML-TGL44-1802
Size:Φ230*H120mm
Power:24W/36W



EML-TGL45-3602
Size:Φ290*H330mm
Power:54W/72W



EML-TGL46-2402
Size:Φ170*H165mm
Power:36W



EML-TGL47-3602
Size:Φ200*H210mm
Power:36W/54W



EML-TGL48-5402
Size:Φ240*H240mm
Power:54W/72W



EML-TGL49-9602
Size:L490*W235*H490mm
Power:144W/192W



EML-TGL50-19202
Size:L490*W515*H600mm
Power:288W/384W



EML-TGL51-10802
Size:L570*W190*H200mm
Power:162W/216W

Input Voltage: DC24V/AC 90v-265v
Material: ALM+ Tempered glass
IP Rating: IP65
LED Life:>30000h
LED chip: CREE/OSRAM
Beam Angle:5°, 12°, 25°, 45°, 60°, 90°
20x45°, 10x60°, 10x75°
Operating Temperature:-25°C~+50°C
Control mode: Constant current driver
DMX512 Control
Color: R/G/B/Y/W/WW/P/RGB/RGBW
CRI: Ra>80
Power Factor:≥0.91




High Power LED Flood Light
大功率LED泛光灯


Input Voltage: DC24V/AC 90V~265V
Material: ALM+ Tempered glass
Ip Rating: IP65
LED Life: > 30000H
LED chip: CREE/OSRAM
Beam Angle: 9°, 15°, 30°, 60°, 90°, 120°
Operating Temperature: -25℃ ~ +45℃
Control mode: Constant current driver,
DMX512 Control
Color: R/G/B/Y/W/WW/P/RGB
CRI: Ra > 80
Power Factor: > 0.97




EML-FGL01A-10W-240V

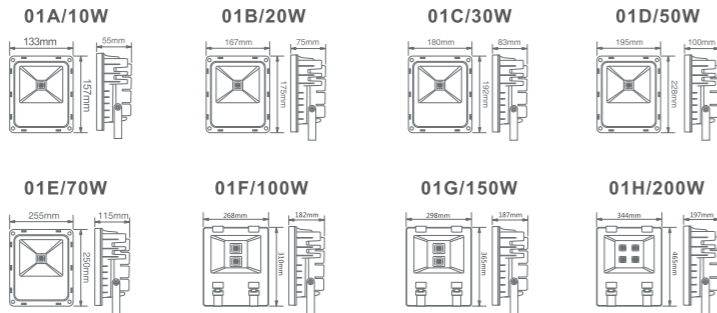


EML-FGL02A-10W-240V

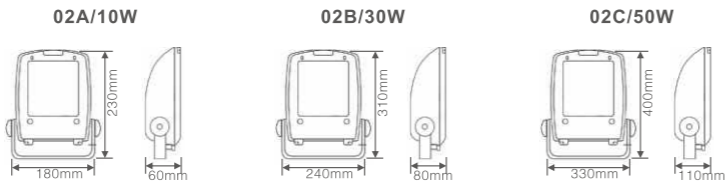

EML-FGL03A-10W-240V

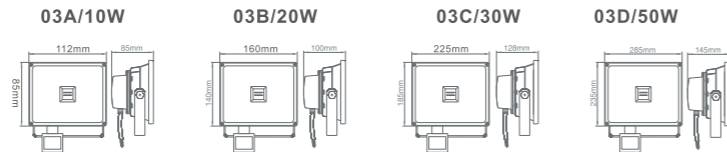

EML-FGL04A-10W-240V
Charging type floodlight for camping

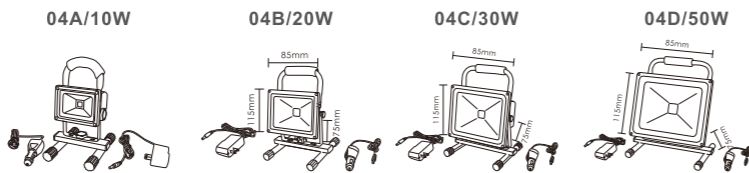

HIGH POWER LED FLOOD Light

大功率LED泛光灯



EML-FGL05A-30W
Size:L230*W192*H150mm



EML-FGL06B-50W
Size:L280*W147*H120mm



EML-FGL07A-100W
Size: L285*W260*H155mm



EML-FGL07B-100W
Size: L285*W260*H155mm



EML-FGL08A-150W
Size:L390*W288*H170mm



EML-FGL08B-150W
Size:L390*W288*H170mm



EML-FGL09A-200W
Size:L390*W350*H175mm



EML-FGL09B-200W
Size:L390*W350*H175mm



EML-FGL10A-50W
Size:L215*W189*H58mm



EML-FGL11A-50W
Size:L216*W188*H55mm



EML-FGL12A-50W
Size:L238*W63*H145mm



EML-FGL13A-10W
Size:L130*W58*H166mm

EML-FGL10B-100W
Size:L273*W242*H61mm

EML-FGL11B-100W
Size:L273*W244*H60mm

EML-FGL12B-100W
Size:L295*W78*H298mm

EML-FGL13B-50W
Size:L229*W72*H295mm

EML-FGL10C-150W
Size:L329*W311*H66mm

EML-FGL11C-150W
Size:L314*W330*H61mm

EML-FGL12C-150W
Size:L295*W95*H340mm

EML-FGL13C-100W
Size:L286*W96*H350mm

EML-FGL10D-200W
Size:L420*W344*H68mm

EML-FGL11D-200W
Size:L420*W346*H66mm

EML-FGL12D-250W
Size:L333*W96*H395mm

EML-FGL13D-150W
Size:L350*W95*H410mm

EML-FGL10E-300W
Size:L463*W450*H69mm

EML-FGL11E-300W
Size:L463*W450*H69mm

EML-FGL12E-400W
Size:L398*W98*H460mm

EML-FGL13E-200W
Size:L350*W95*H410mm



High Power LED Window Sill Light



大功率LED窗台灯



EML-WSL01-0205
Size:L152*W64*H96mm
Power:10W





EML-WSL02-0305
Size:L175*W48*H90mm
Power:8W/12W



EML-WSL03-0105
Size:L100*W57*H67.5mm
Power:4W



EML-WSL04-0205
Size:L130*W70*H89mm
Power:8W




EML-WSL06-0105
Size:L141*W40*H70mm
Power:5W



EML-WSL07-0205
Size:L182*W40*H50mm
Power:10W



EML-WSL05-0305
Size:L156*W80*H96.5mm
Power:12W



EML-WSL08-0205
Size:Φ100*H80mm
Power:5W/8W



EML-WSL10-0205
Size:Φ120*H180mm
Power:10W

EML-WSL09-0305
Size:Φ90*H100mm
Power:5W/8W



专为窗户照明避免光污染设计的新型照明灯具，高导热铝合金灯体，阿克苏户外抗紫聚酯喷涂

A new lighting fixture designed for window lighting to avoid light pollution, high thermal conductivity aluminum lamp body, aksu outdoor anti-violet polyester coating.

Input Voltage: DC24V/AC 90v-265v
Material: ALM+ Tempered glass
IP Rating: IP65
LED Life:>30000h
LED chip: CREE/OSRAM
Beam Angle: 1°180°/2°180°/1°360°
Operating Temperature: -25°C~+50°C
Control mode: Constant current driver
DMX512 Control
Color: R/G/B/Y/W/WW/P/RGB/RGBW
CRI: Ra>80
Power Factor: ≥0.91

LED 控制系统 Control system



EML-1000S
Control: ≤2048pixels (TTL信号)



EML-T-1000B
Control: ≤2048pixels (TTL信号)



EML-8000C
Control: ≤8*1024pixels (TTL信号)
≤8*512pixels(DMX512)
(注: 可多台级联脱机控制, 播放内容存放在SD卡中)



EML-5000K
Control: ≤8*768pixels(TTL信号)
≤8*512pixels(DMX512)
(注: 电脑联机, 最大可支持30万像素点控制)



EML-218DW
Control: ≤8*170pixels(DMX512)
(注: 如DMX512解码芯片支持拓展, 可按照其拓展通道数来驱动)



EML-BF12B
Control: ≤150000pixels(DMX512)
(注: 支持多台脱机主控远程在线下载, 更新脱机节目; 可支持不同类型灯具以及不同协议灯具混用, 兼容性强)

LED 防水电源 Waterproof Power Supply (IP67)



LED 防雨电源 Waterproof Power Supply (IP65)



EML-PS01-250W/350W/400W



EML-PS02-250W/350W/400W



EML-SP01-6W/7.2W/12W/20W/30W
36W/48W/60W/72W

UL标准电源适配器 UL Standard Power Adapter